

Mosa.

Light recommendations for tiled wall surfaces





Light recommendations for tiled wall surfaces

All Mosa tiles are produced in compliance with ANSI A137.1 and meet strict flatness requirements within allowed tolerances on warpage and lippage. Mosa upholds strict norms regarding the flatness and straightness of its tiles. To ultimately obtain a smooth and flat tiled wall, the substrate must be almost perfectly flat, and the recommended, well filled, grout line must be as straight as possible.

Tiles should be installed by an experienced professional, adhering to local building codes. When using lighting located on or near tiled walls, however, any unevenness in the wall might be accentuated due to light casting shadows on some of the tiled surface joints. To give the wall its intended uniform appearance, Mosa provides the following recommendations for light fixtures:

- Inform tile installers about the lighting plan and the possible negative effects of the light installation on the tiles' appearance.
- Install light fixtures prior to installing the tiles, so that the tile installer is able to make adjustments while installing tiles.
- Install light fixtures at least 20 inches (50 centimetres) away from the wall, preferably in the centre of the room. This way, the light strikes the surface at a wide, downward angle.
- Baffle the light if it is not possible to change its position.

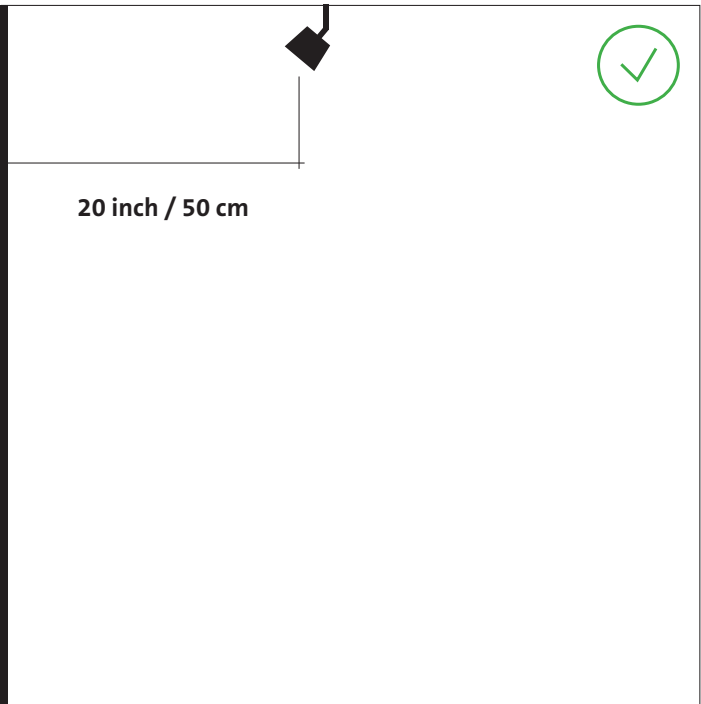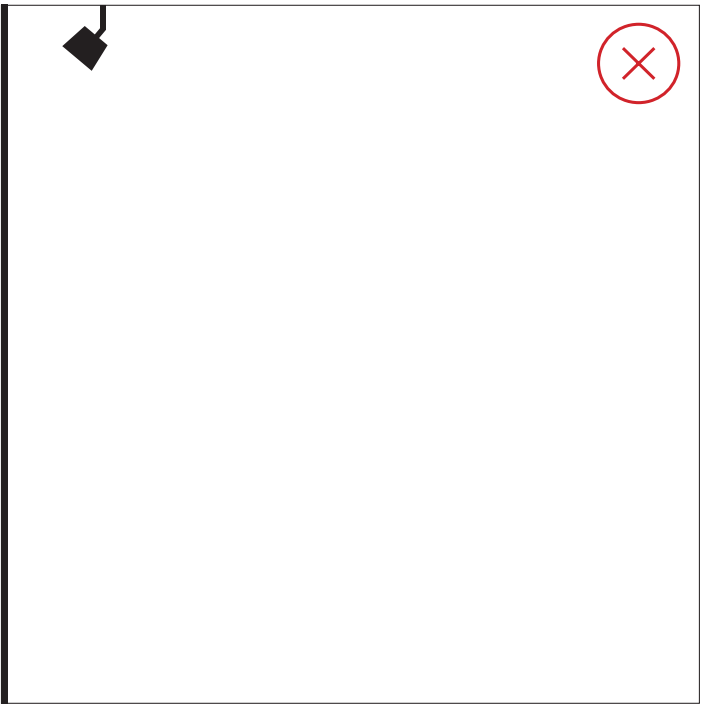

Mosa.

Royal Mosa

Meerssenerweg 358

P.O. Box 1026

NL-6201 BA Maastricht

T +31 (0)43 368 92 29

info@mosa.com

www.mosa.com