



TOWN &
COUNTRY
SURFACES

PROFILE
Reshaping the boundaries of ceramic decoration.

Like the faces of the Earth, we present our Vineyard, Dune, Sawgrass and Slope ceramic versions, staying true to our roots. **Harmony between colour and form.**

Vertical surfaces with unconventional shapes which capture who we are.

Remodelando los limites de la decoración cerámica.

Como las caras de la Tierra, presentamos nuestras versiones cerámicas Vineyard, Dune, Sawgrass y Slope, manteniéndonos fieles a nuestras raíces.

Armonía entre color y forma.

Superficies verticales de formas poco convencionales que capturan nuestra identidad.

01. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	pag. 6
02. GET INSPIRED / INSPIRATE	pag. 8
03. LAYOUTS / COLOCACIONES	
04. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	pag. 42
05. PACKING	
06. PRICE CODE CÓDIGO DE TARIFA	pag. 46
07. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	pag. 47
08. RECOMMENDATIONS / RECOMENDACIONES	pag. 47
	pag. 48
	pag. 49



PROFILE W

SHAPES

Lanyard
W05

Sawgrass
W26

Slope
W26

Vineyard
W26

DUNE
W26

Segment
W32

5x40 cm / 2"x16"

12,5x25 cm / 5"x10"

COLOURS

Bone

Grey

Vegan

Tan

Henna


Pine

Steel
Blue

Coal

White
Gloss

*Available in all shapes /Disponible en todos los relieves

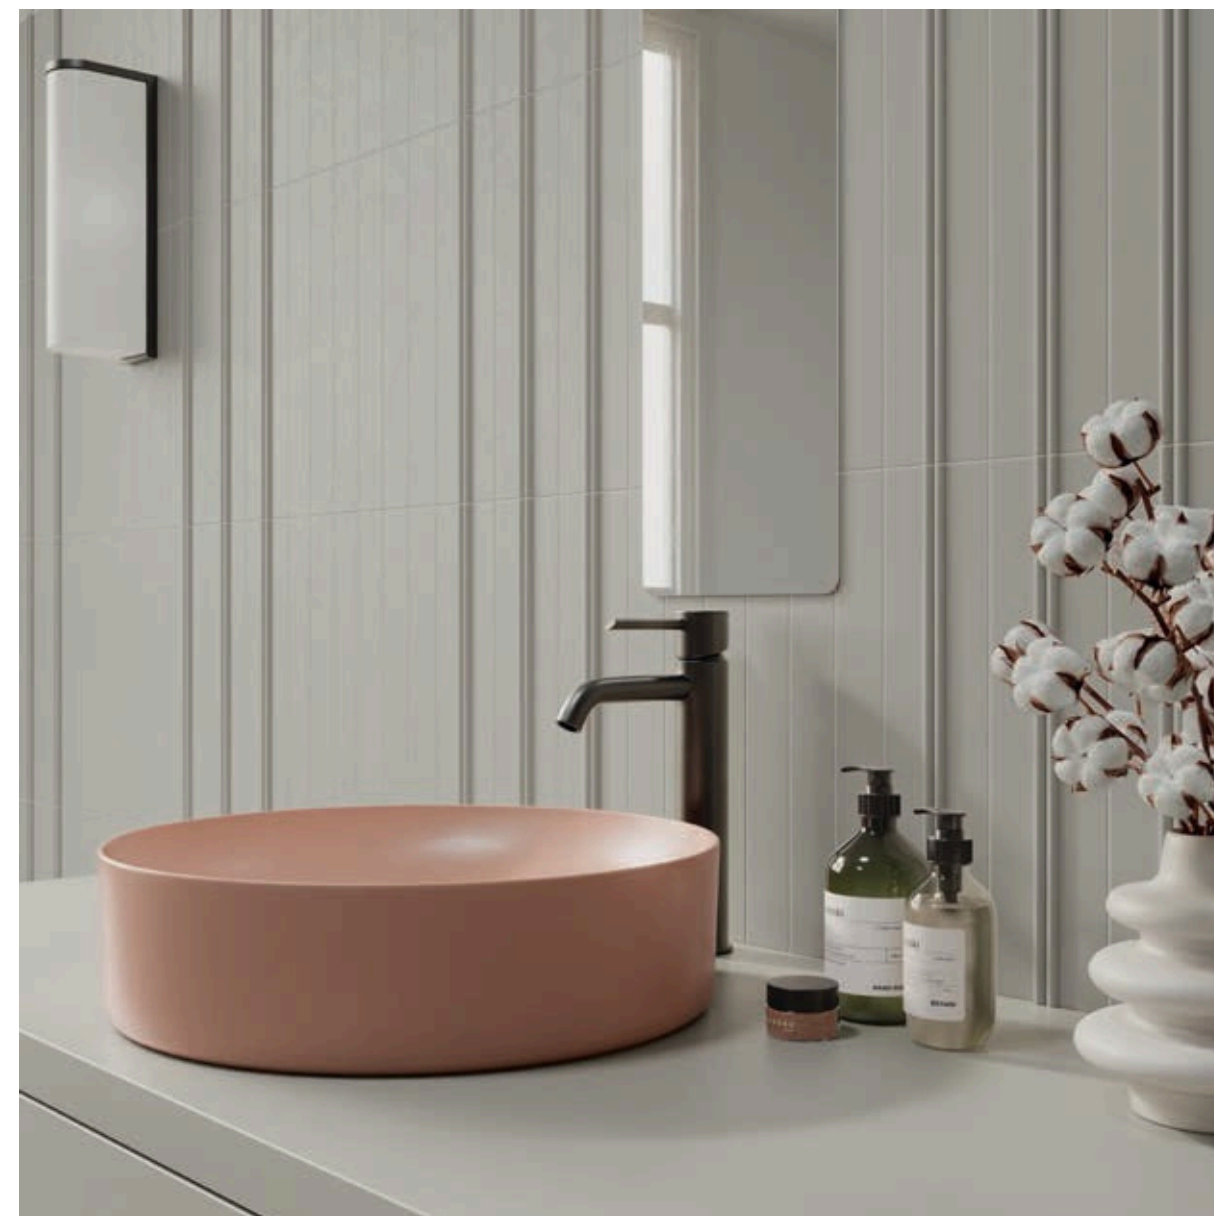


◀ Slope Tan Lanyard Tan Floor Tiles Contempo Strip Natural (Love Affairs collection)



Lanyard Grey - 50% Vineyard Grey - 50%



PROFILE
Vineyard

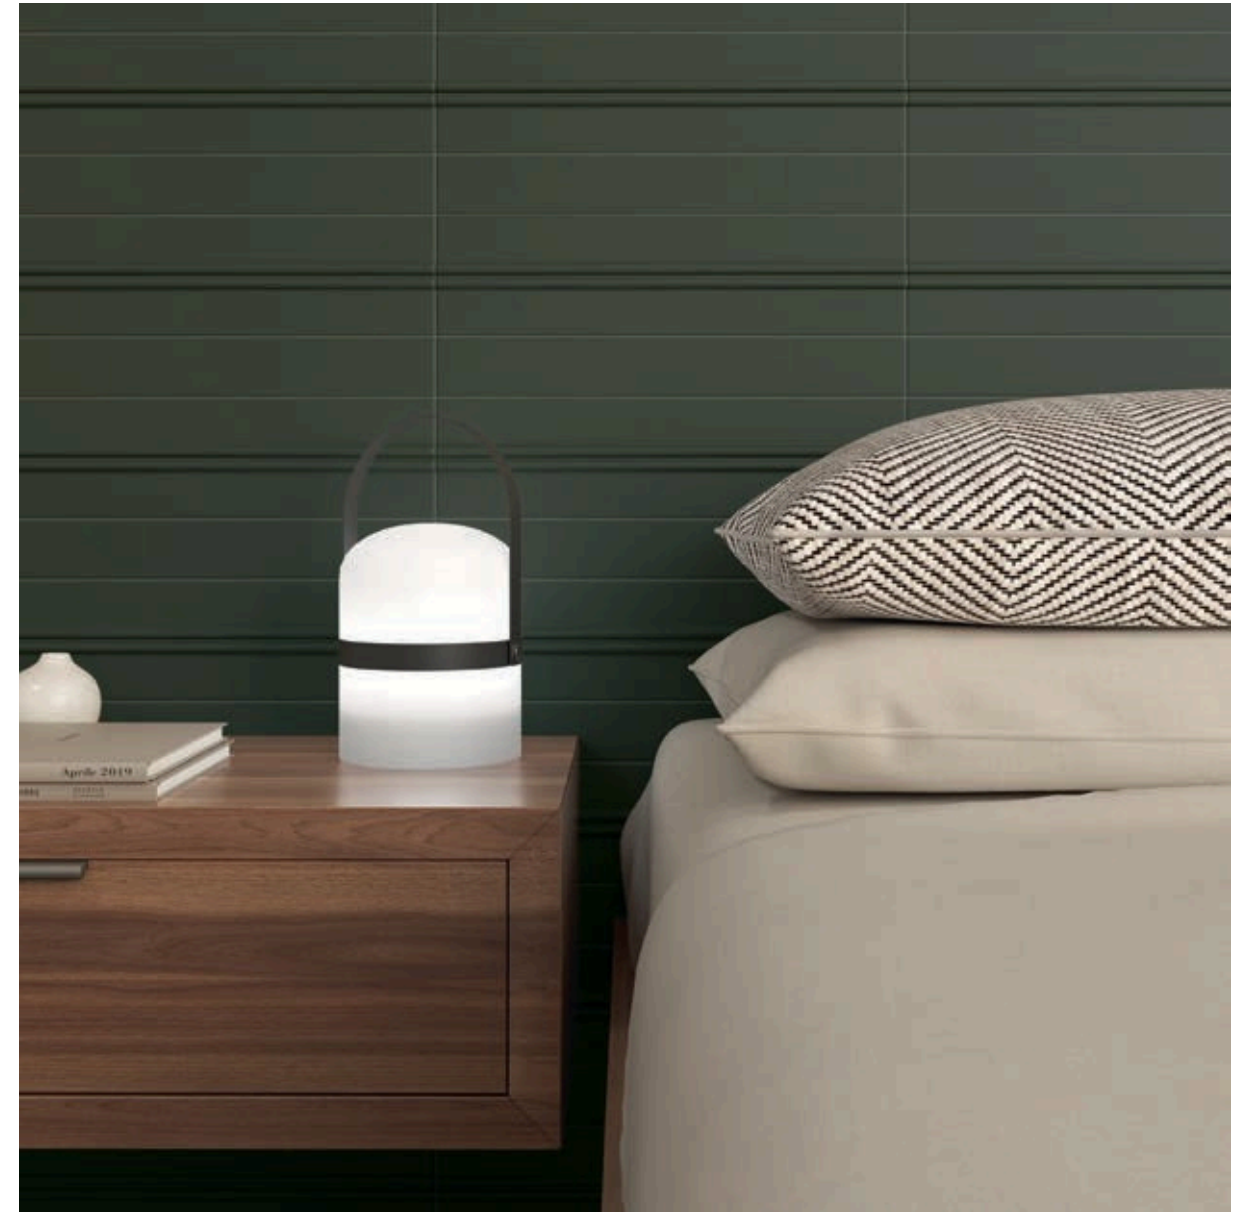

◀ Lanyard Pine - 33% Vineyard Pine - 66% Floor Tiles: Lines S & M Chalk (Raster collection)




Sawgrass Vegan Floor Tiles: Play Blanc
(Tesserae collection)




Sawgrass Coal- 50% Dune Coal - 50% Floor Tiles: Grid S & M Chalk (Raster collection)
Lines S & M Chalk (Raster collection)



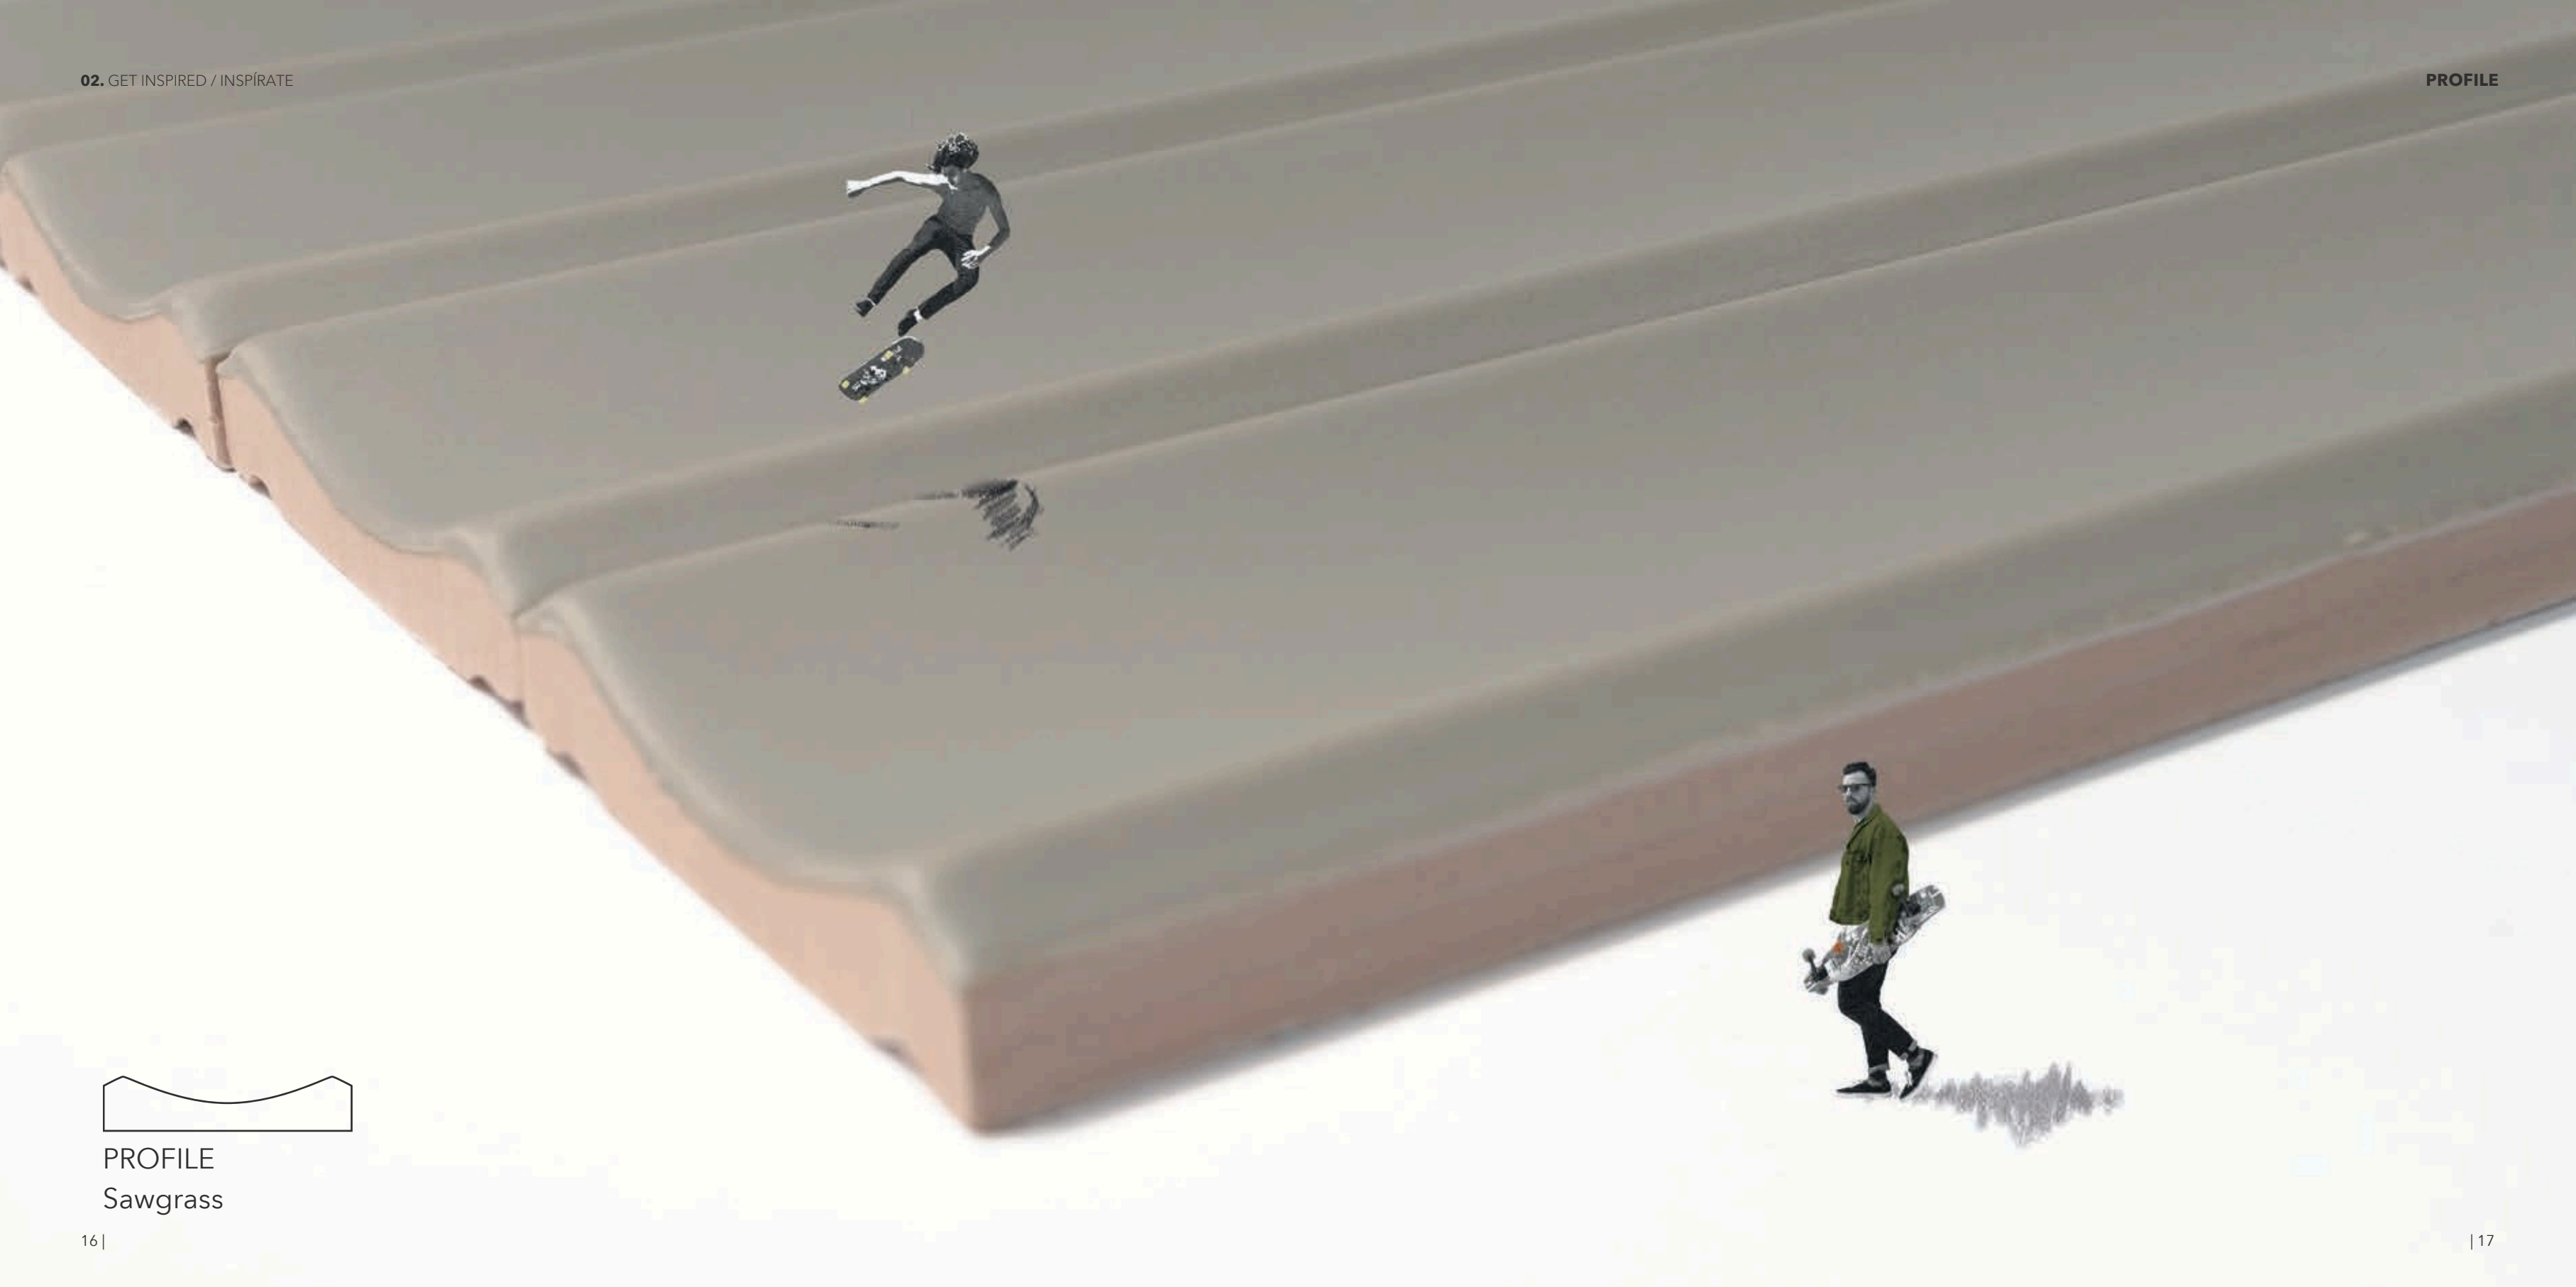

PROFILE
Sawgrass

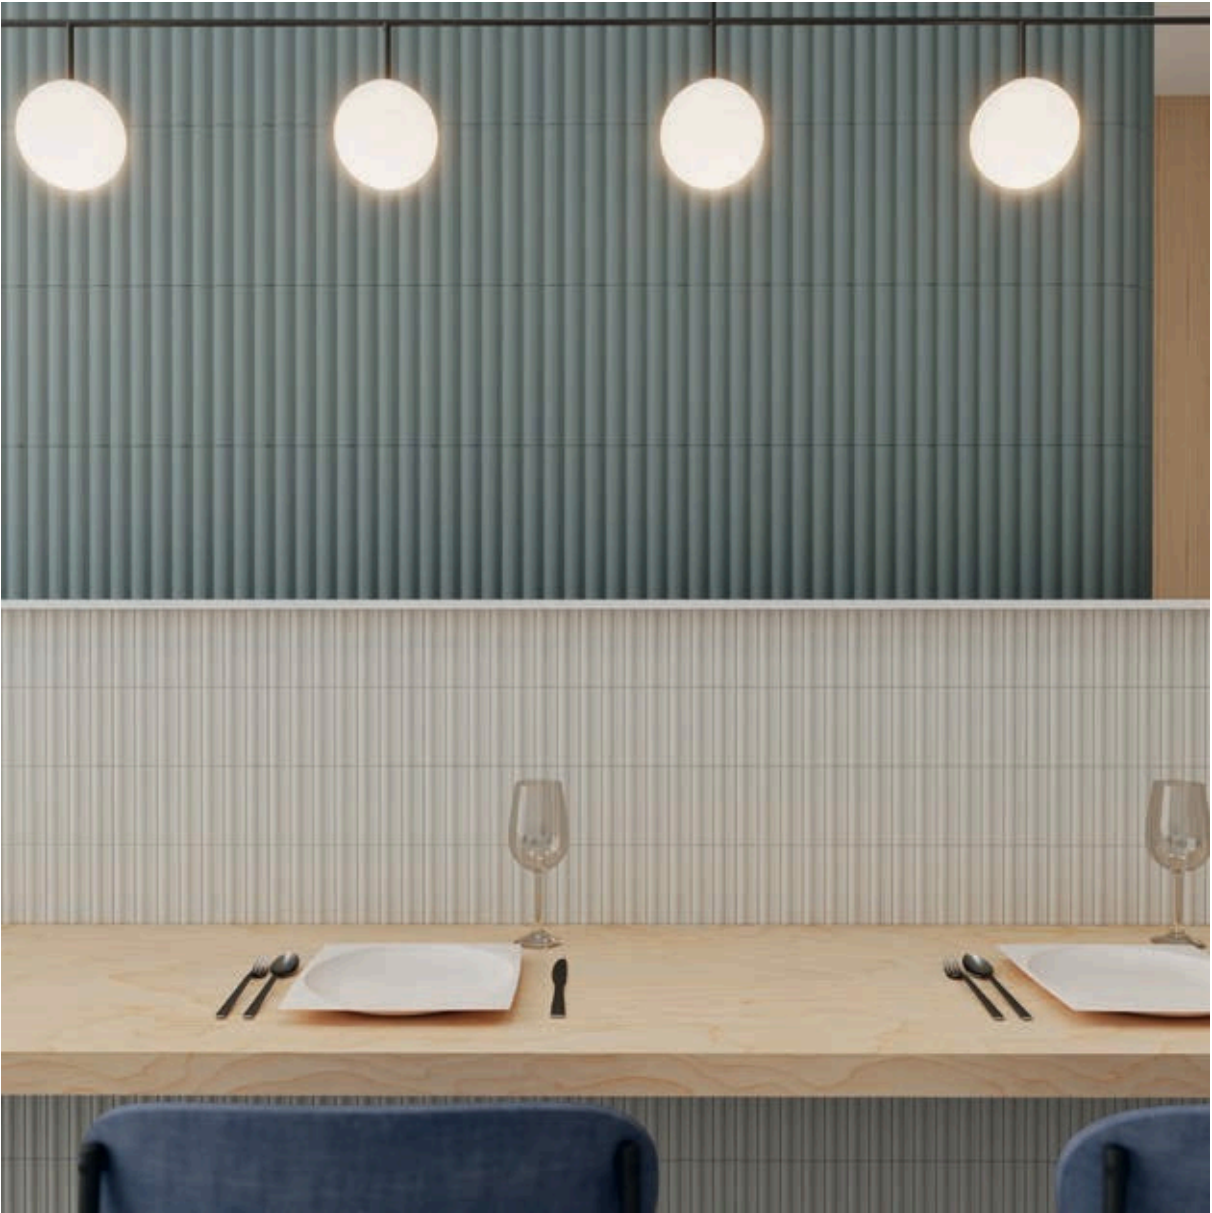

 **Dune** Steel Blue & Tan
Segment Bone ▶





◀ **Slope Bone, Lanyard Bone & M Moss (Raster collection)** **Floor Tiles: Lines S**



Sawgrass Grey
50% **Dune Grey**
50% **Lanyard Grey**

Floor Tiles: Suit Blanc (Tesserae collection)



PROFILE
Slope



 **Vineyard** Henna **Dune** Henna **Floor**
Tiles: Grid S Mud (**Raster collection**)
 **Lines S & M** Mud (**Raster collection**)


Slope Steel Blue **Lanyard** Steel Blue **Floor**
Tiles:Contempo Strip Oak (**Love Affairs collection**) ▶





Segment Pine Lanyard Tan
◀ Floor Tiles: Solid XS & S
Chalk

Segment
Henna



PROFILE
Lanyard



Segment Steel Blue 
Sawgrass Steel Blue 
Floor Tiles: Stardust
Ivory



Floor Tiles: Play Board Mar (Tesserae collection)







Dune Pine Lanyard Pine Floor Tiles: Grid S & M Chalk (Raster collection)



Lanyard White Gloss Sawgrass White Gloss Floor Tiles: Color Drops Graphite

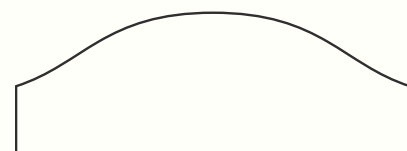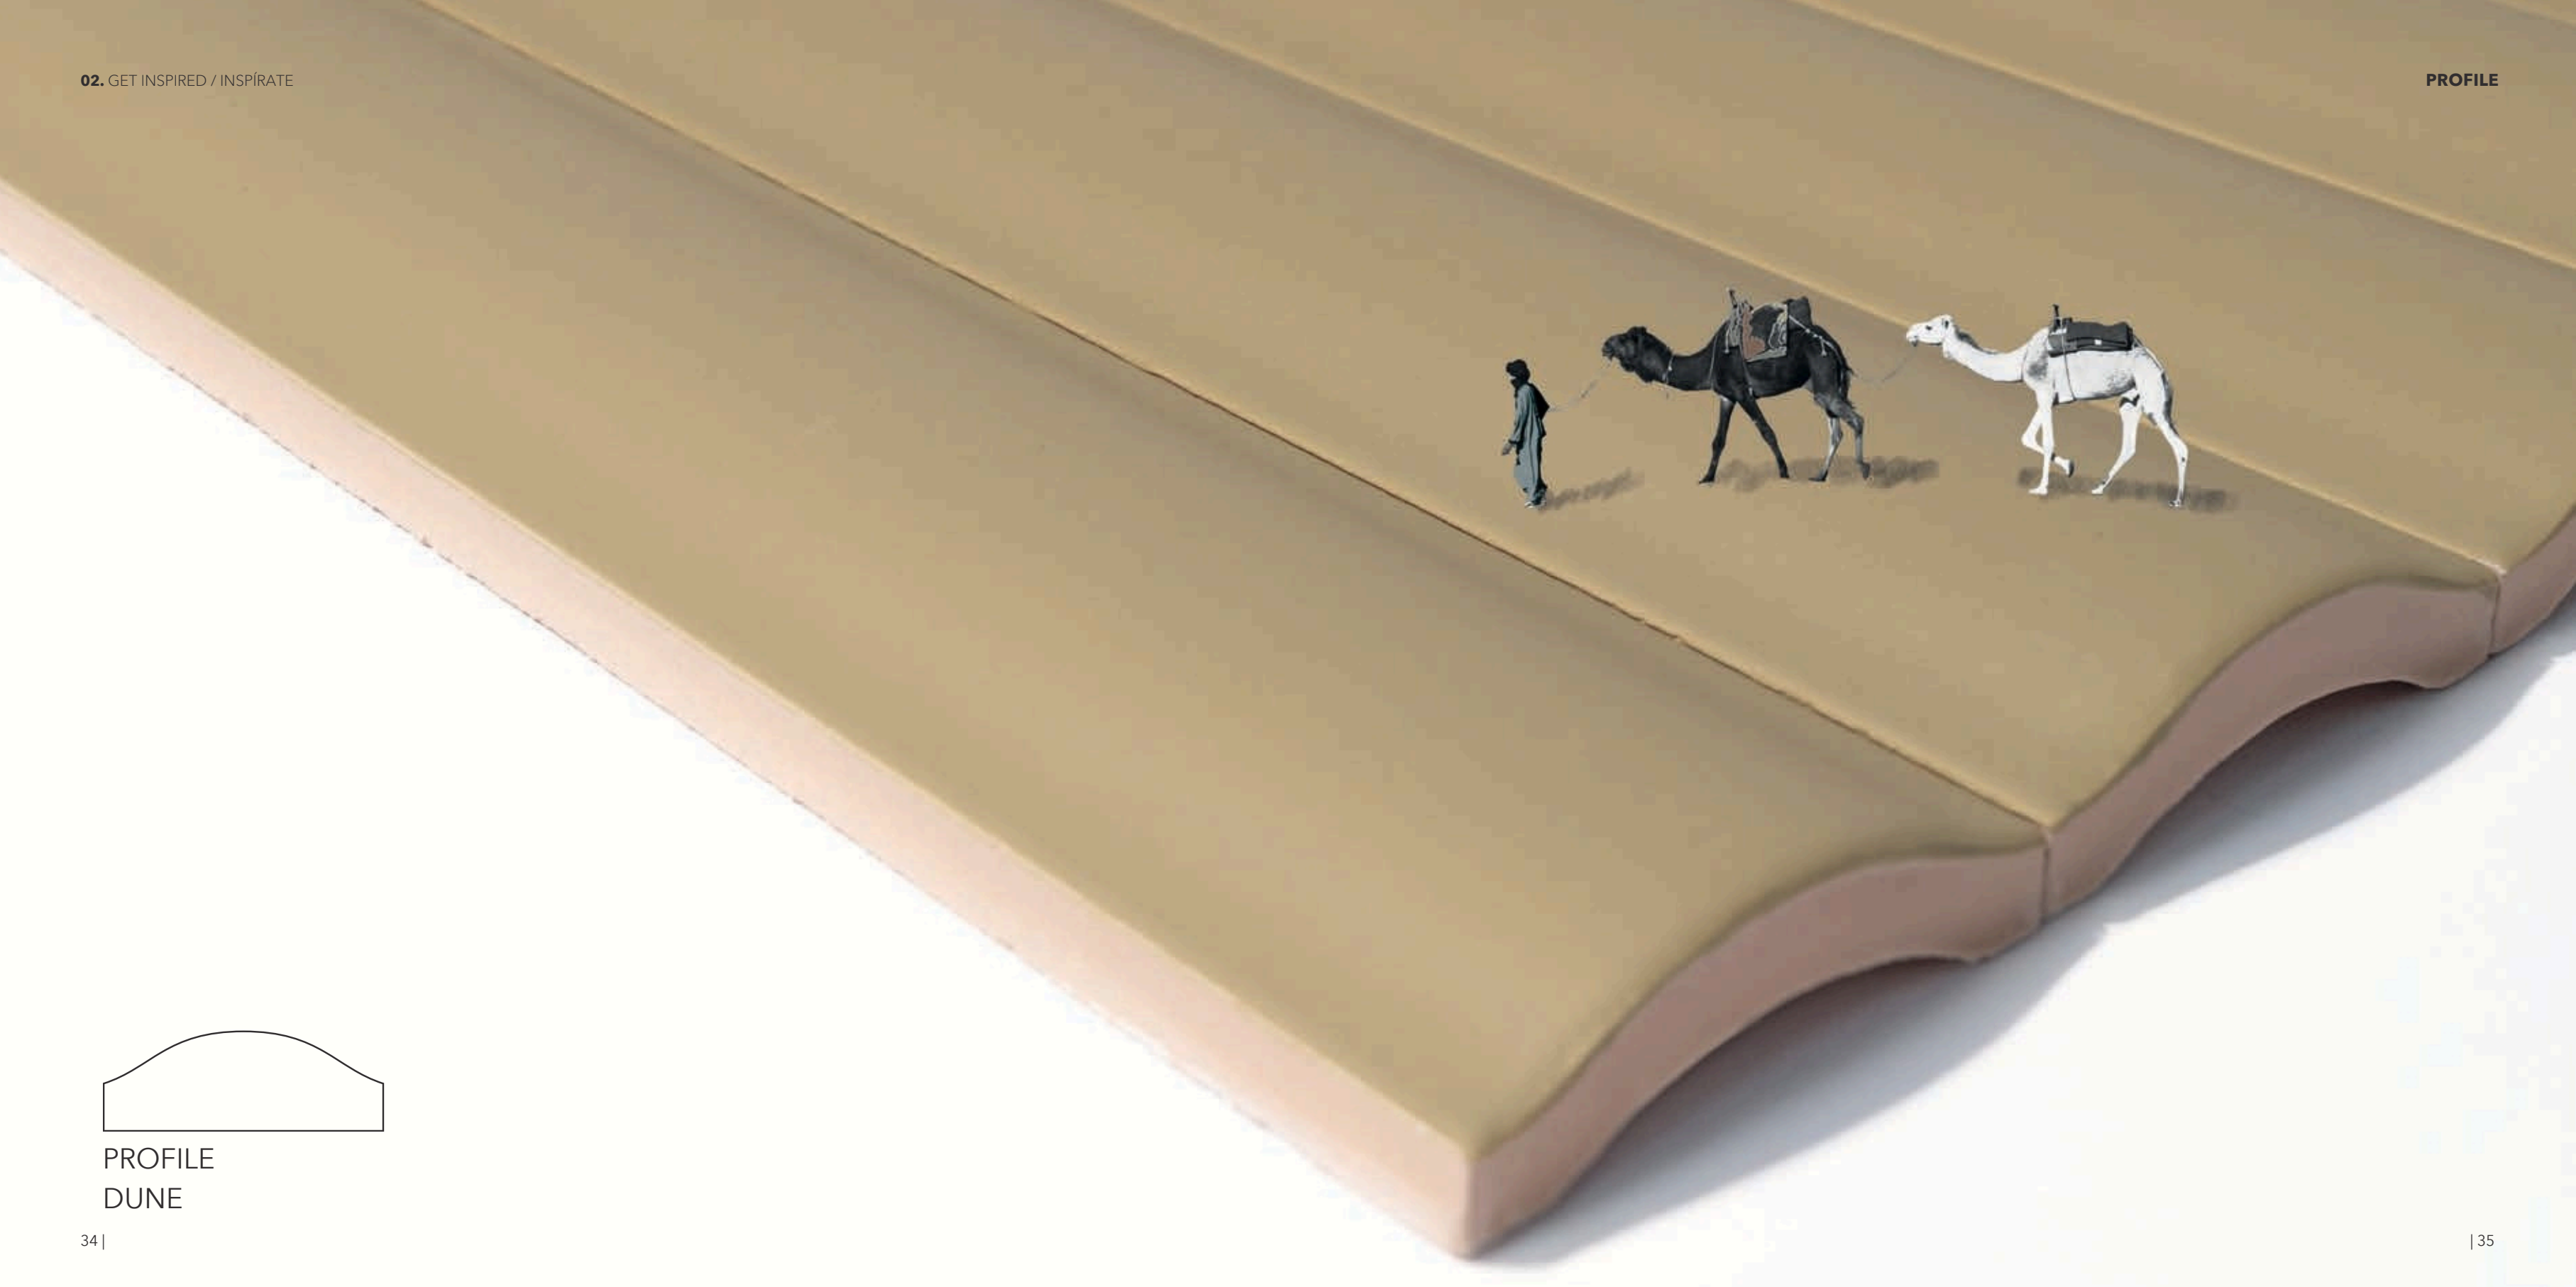

PROFILE
DUNE



Dune White Gloss





Slope Coal Lanyard Coal
Floor Tiles: Stardust Cotto





Dune Vegan Sawgrass Vegan Segment
 Vegan Floor Tiles: Strip Aura (Love Affairs collection)



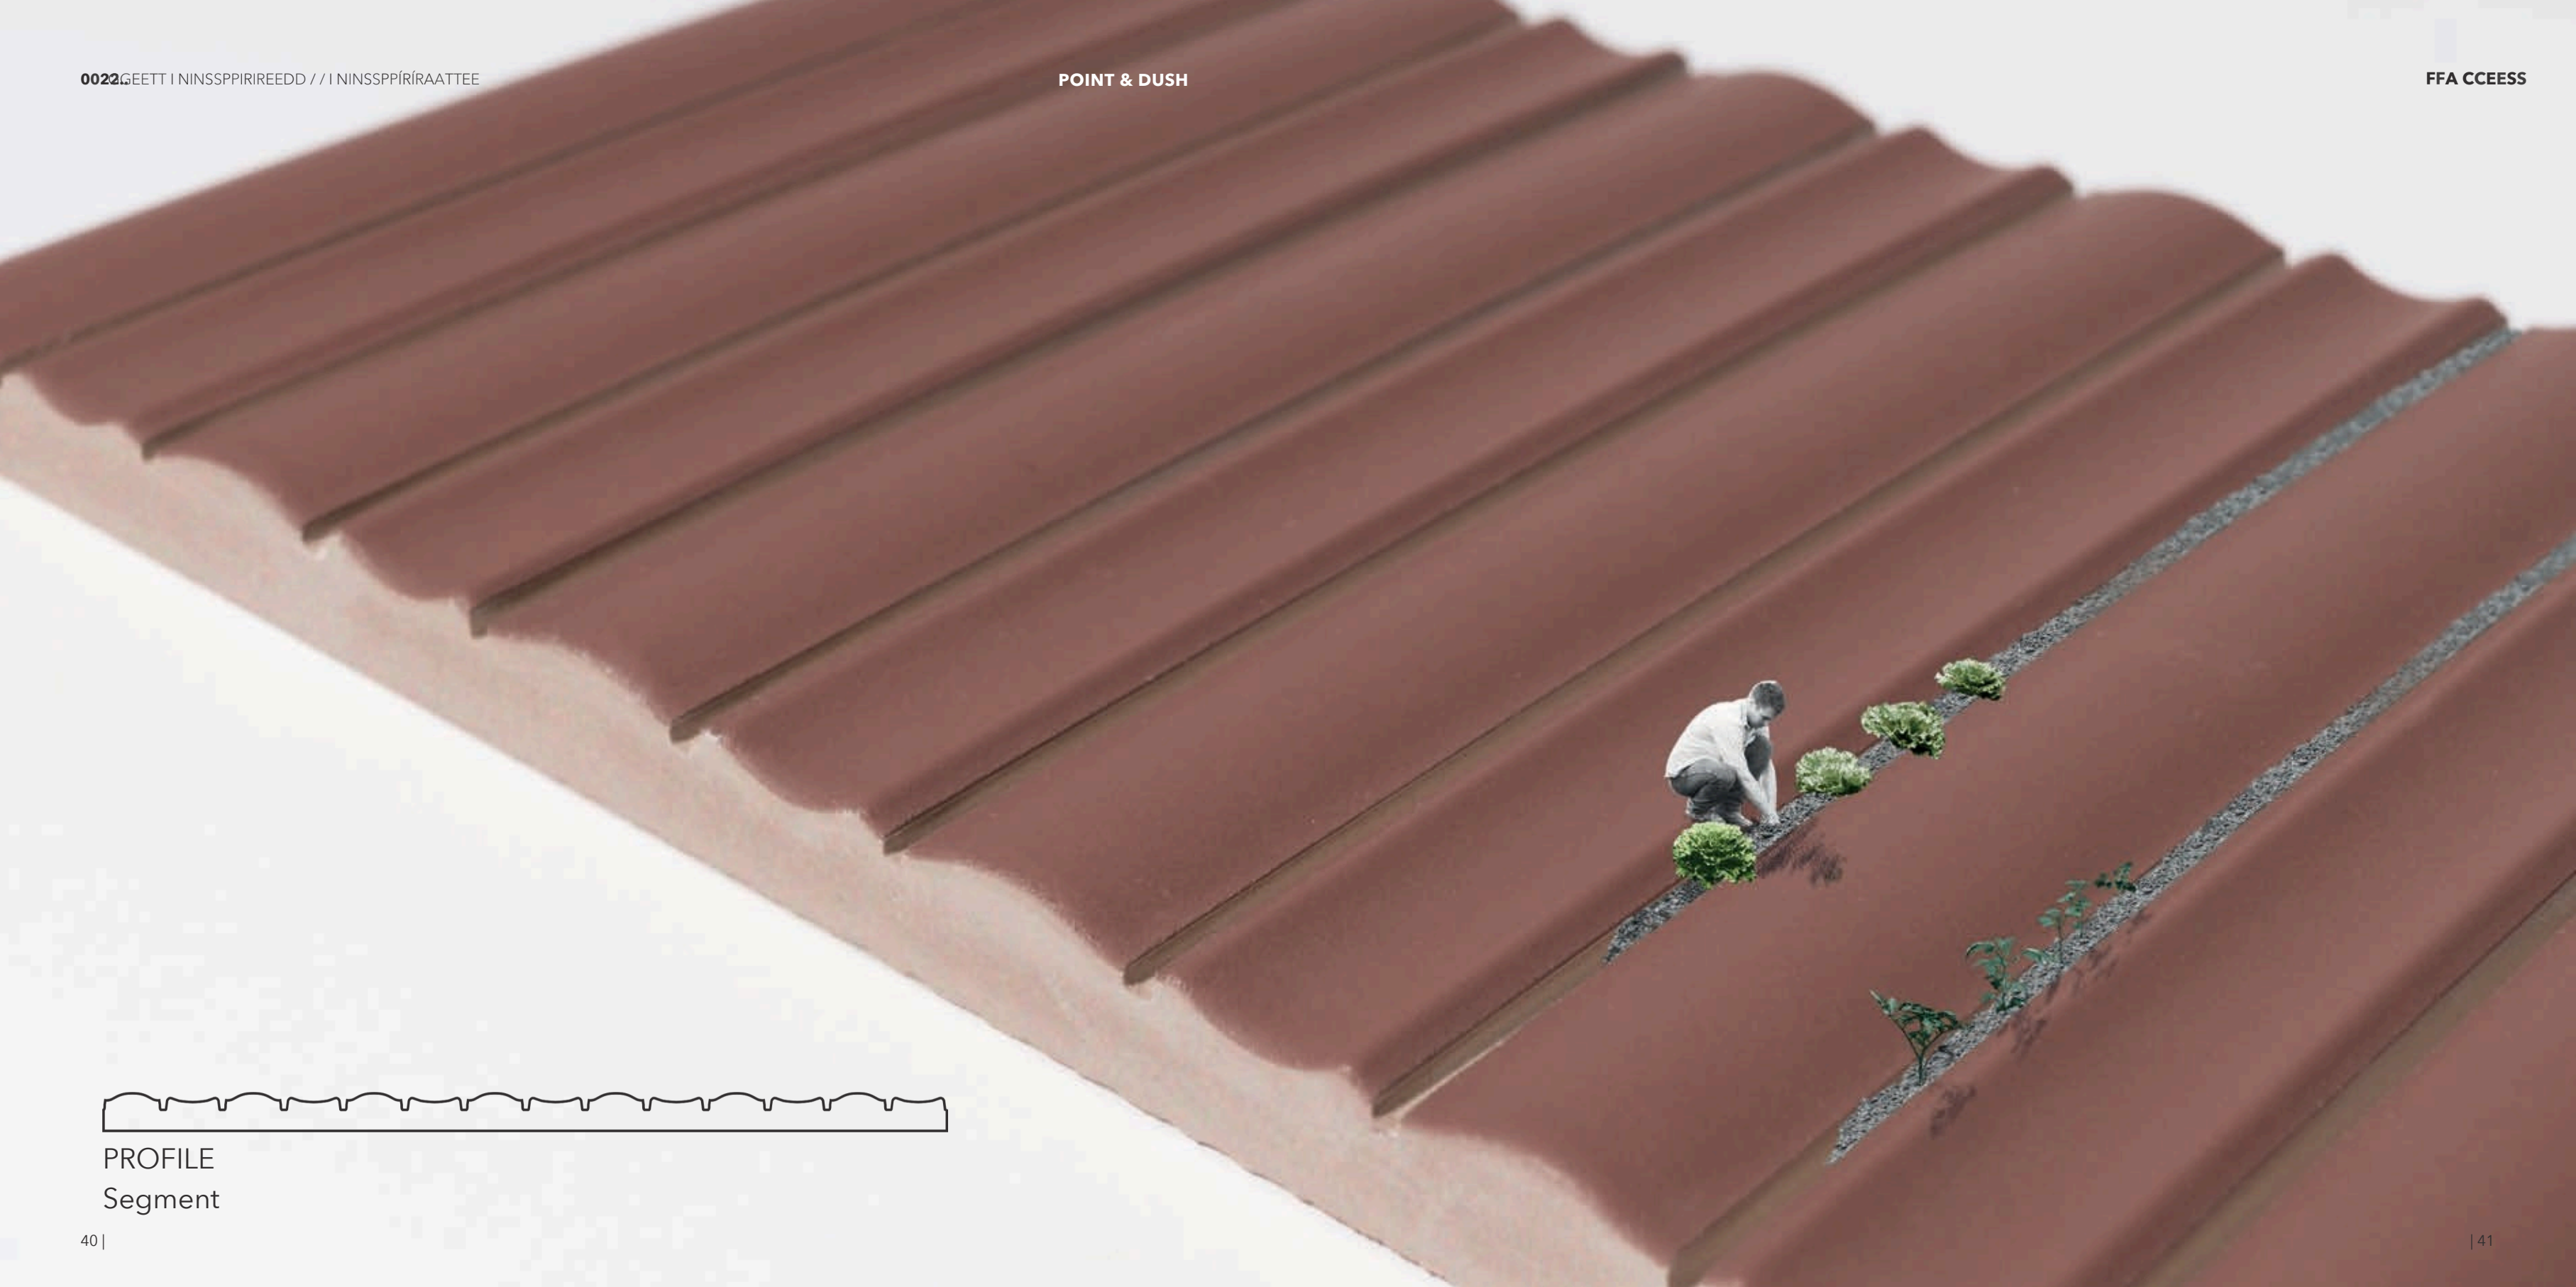

PROFILE
Segment




DUNE - 50% Sawgrass - 50%



Vineyard - 50% DUNE - 50%



Lanyard - 50% Sawgrass - 50%

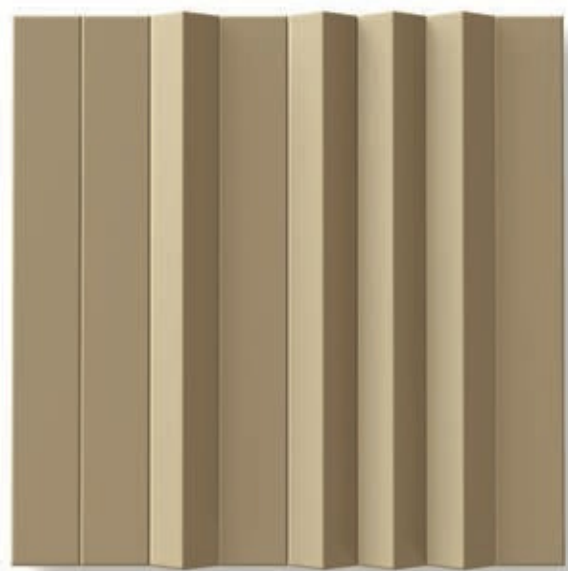

Lanyard - 50% Slope - 50%



DUNE - 50% Slope - 50%



Vineyard - 50% DUNE - 50%



Lanyard - 25% Vineyard - 75%



Sawgrass - 50% Slope - 50%



Henna

Vineyard - 50%

Sawgrass - 50%



Tan

Lanyard - 50%

Sawgrass - 50%




White Gloss



Lanyard - 50%



Sawgrass - 50%

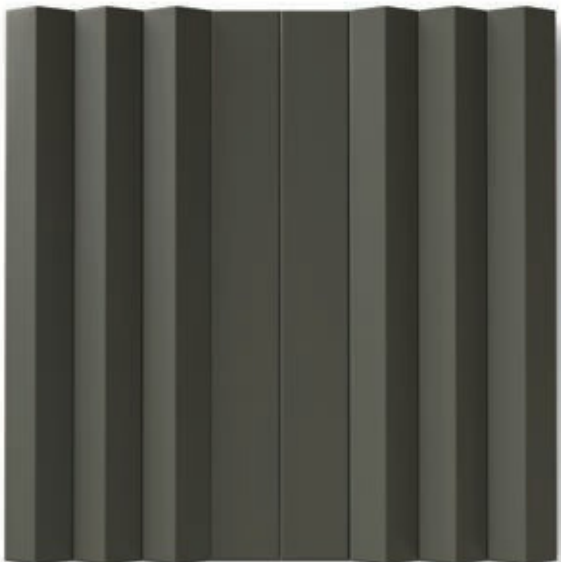

Pine



Lanyard - 25%



Slope - 75%



Grey

Lanyard - 37,5%

Sawgrass - 12,5%


DUNE - 50%



Coal

Lanyard - 50%

DUNE - 50%

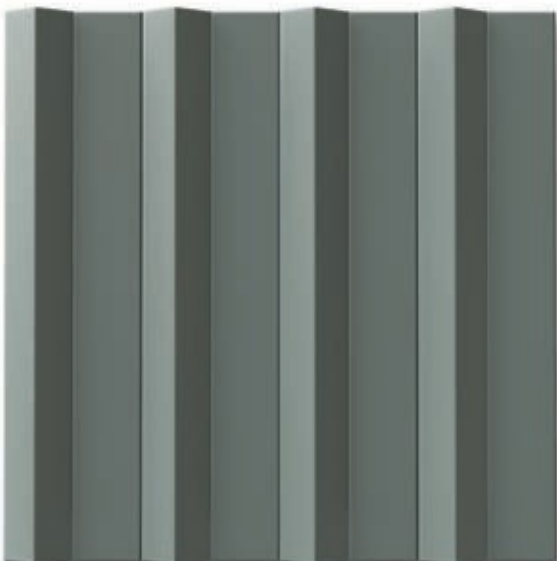

Steel Blue



Lanyard - 50%



Slope - 50%



Vegan




Lanyard - 50%



Vineyard - 50%

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%) Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)			
FEATURES / CARACTERÍSTICAS		SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	51 mm +/- 0,75 mm % x 403 mm +/- 0,5 % 124 mm +/- 0,75 mm % x 249 mm +/- 0,5 %	UNE-EN ISO 10545-2:1998
	Water absorption	> 10%	UNE-EN ISO 10545-3:1997
	Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm2 Thickness < 7,5 mm mínimo 15 N/mm2	UNE-EN ISO 10545-4:2012
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	5	UNE-EN ISO 10545-14:1998
	White Body	-	

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 /
PROFILE	5x40 cm	56	15,100 kg	1,120 m2	60	Palet
Lanyard	5x40 cm	54	15,900 kg	1,080 m2	60	67,200
PROFILE	5x40 cm	30	10,250 kg	0,600 m2	60	m2
Vineyard	5x40 cm	54	16,000 kg	1,080 m2	60	64,800
PROFILE	5x40 cm	30	10,160 kg	0,600 m2	60	m2
Slope	12,5x25 cm	13	6,920 kg	0,406 m2	138	36,000
PROFILE Sawgrass			LB 	FT2 		m2 64,800 
PROFILE						m2
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
PROFILE	2"x16"	56	33.290 lb	12.056 ft2	60	723.36 ft2
Segment	2"x16"	54	35.054 lb	11.625 ft2	60	697.50 ft2
Lanyard	2"x16"	30	22.597 lb	6.458 ft2	60	387.48 ft2
PROFILE	2"x16"	54	35.274 lb	11.625 ft2	60	697.50 ft2
Vineyard	2"x16"	30	22.399 lb	6.458 ft2	60	387.48 ft2
PROFILE	2"x16"	30	22.399 lb	6.458 ft2	60	387.48 ft2
Slope	5"x10"	13	15.216 lb	4.370 ft2	138	603.06 ft2
PROFILE Sawgrass						
PROFILE						
DUNE						
PROFILE						
MODEL / MODELO					PRICE CODE / CODIGO TARIFA	
Lanyard Vineyard, Slope,					W05	
Sawgrass & DUNE Segment					W26	
					W32	

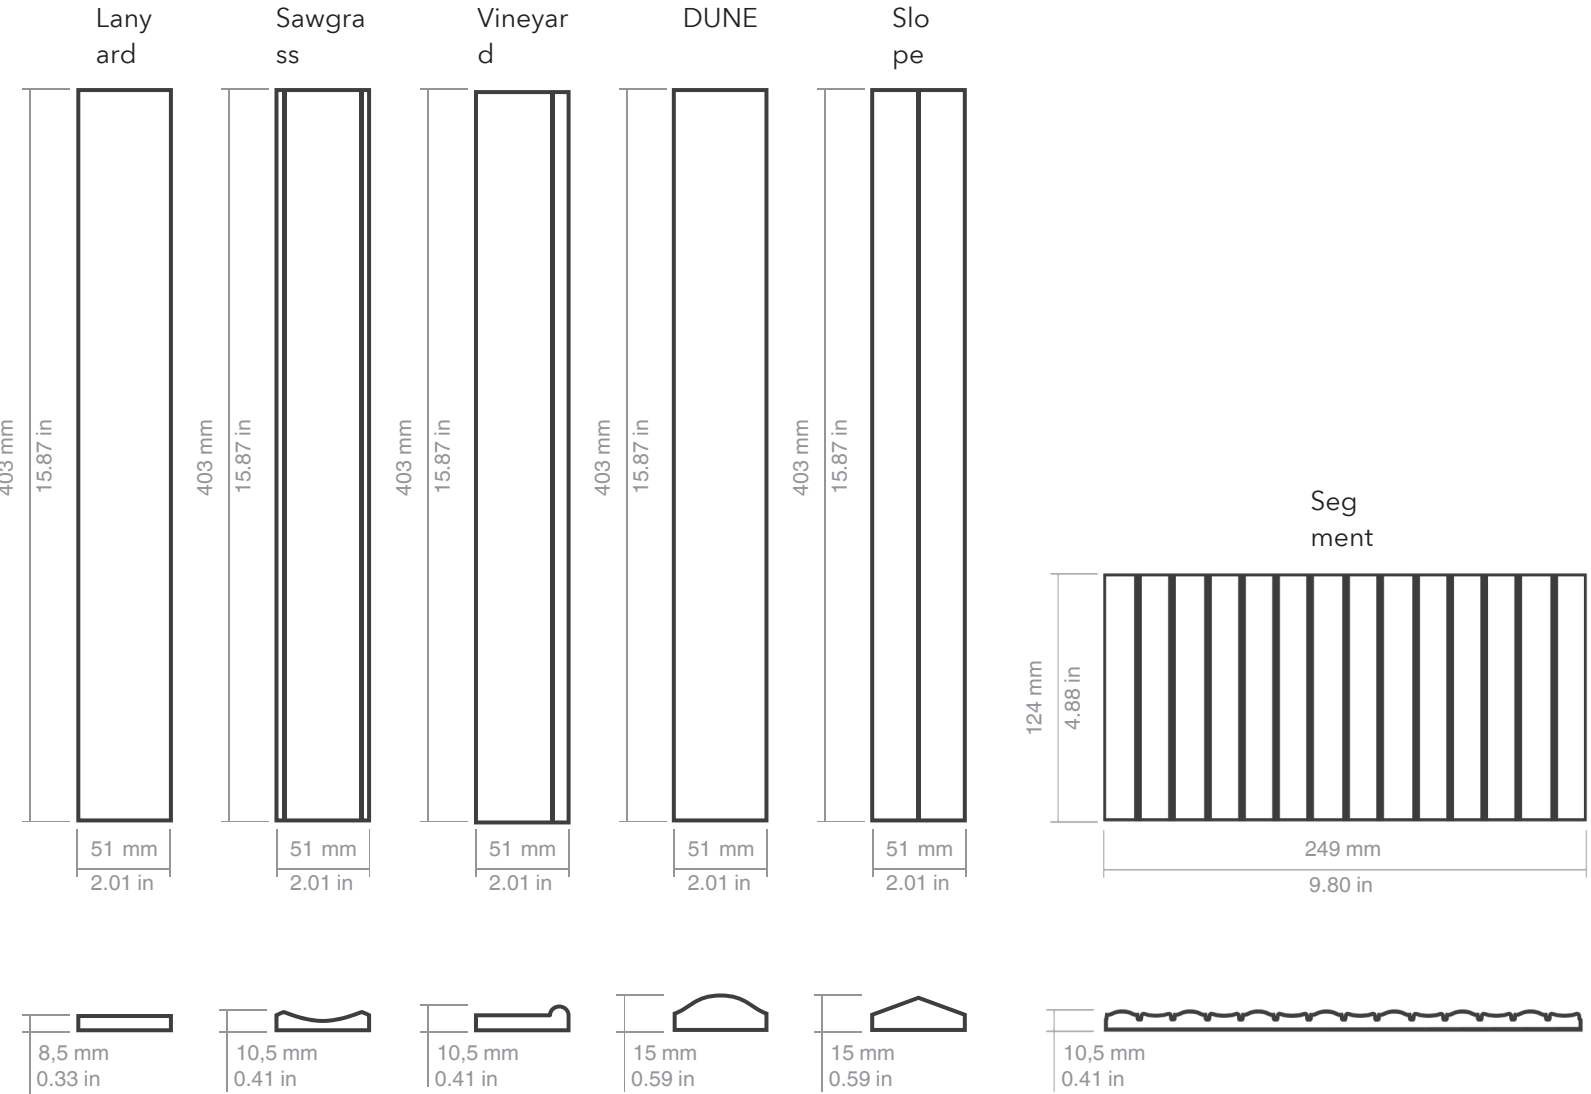

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion. Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result that enhances the mosaic effect, we recommend using 1,5 mm (0.06") of joint, as well as a joint color that contrasts with the tone of the piece.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes. As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión. Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Para un resultado óptimo que realce el efecto mosaico recomendamos usar 1,5 mm de junta, así como un color de junta que contraste con el tono de la pieza.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos. Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.



MORE INFO:



Town & Country Surfaces
230 Fifth Avenue
Suite 1714
New York NY 10001

General Inquiries:
info@tncsurfaces.com
Phone: 212-679-0312