



Varnish

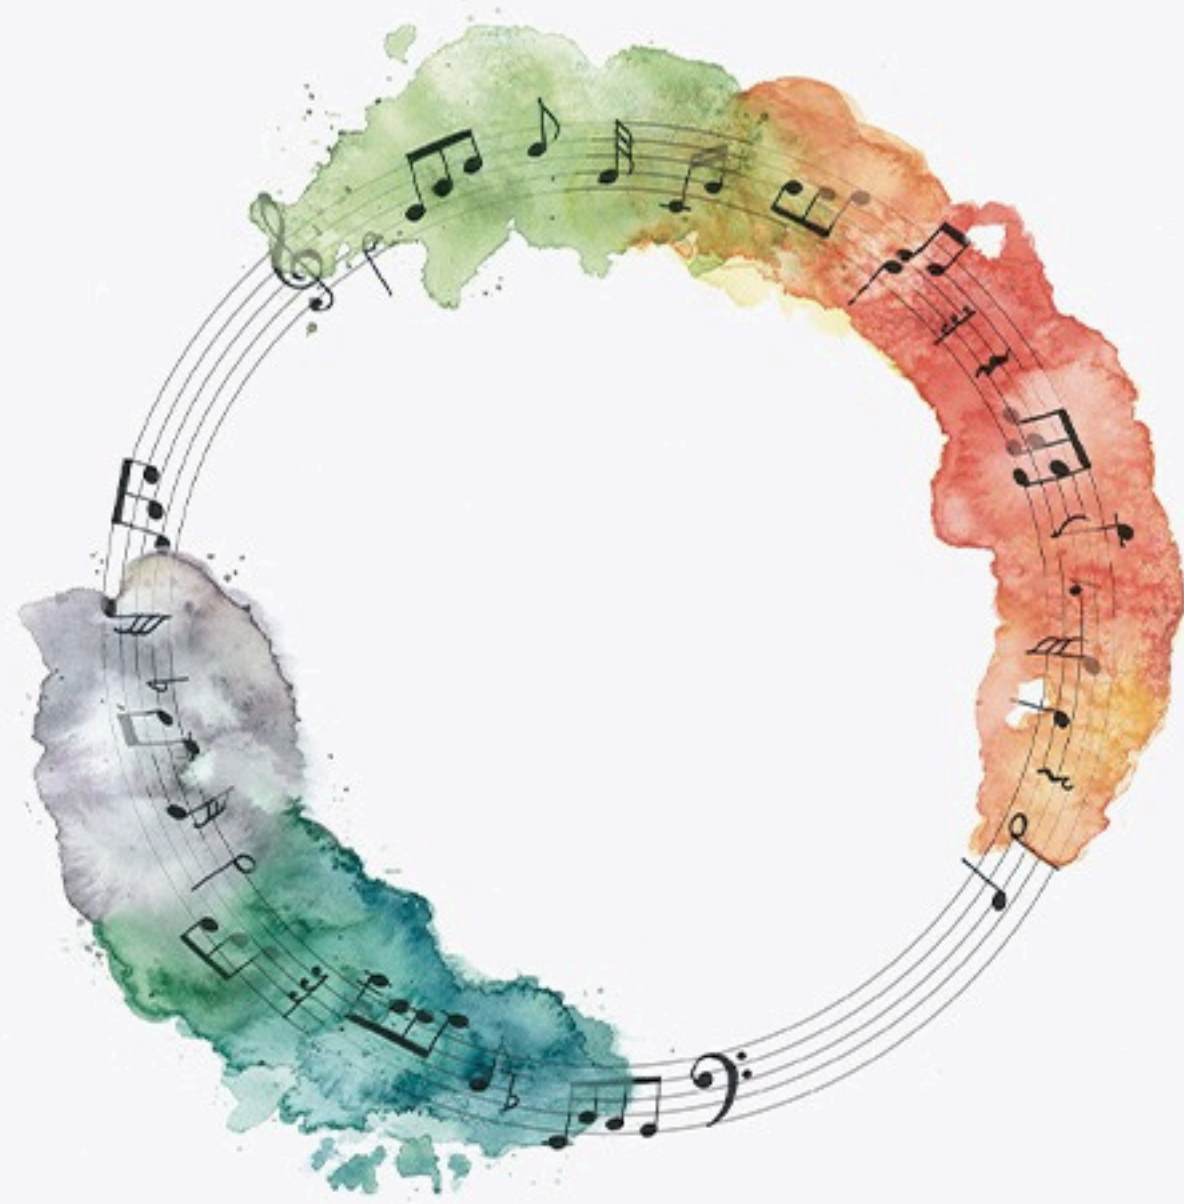

TOWN &
COUNTRY
SURFACES

Varnish

*Inspired by vibrant notes, this collection merges the artistic expression of colour splashes with the melodic harmony of musical notes. Transform your space into a chromatic masterpiece, where Varnish glide across the surface like chords on a musical score. Mix and match according to your inspiration, creating a unique composition that resonates with style. Welcome to the symphony of ceramics. -
Inspirada en las vibrantes notas, esta colección fusiona la expresión artística de manchas de color con la armonía melódica de notas musicales. Convierte tu espacio en una obra maestra cromática, donde las notas de color se deslizan sobre la superficie como acordes en una partitura. Combina según tu inspiración, crea una composición única que resuene con estilo. Bienvenidos a la sinfonía de la cerámica.*

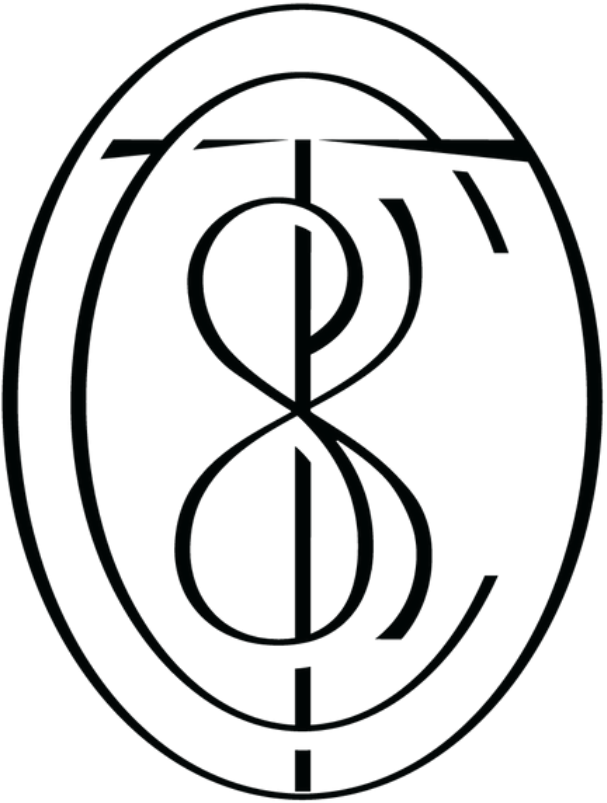

01.
SIZES, COLOURS AND FINISHES /
FORMATOS, COLORES Y ACABADOS

02.
GET INSPIRED /
INSPIRATE

03.
TECHNICAL FEATURES /
CARACTERÍSTICAS TÉCNICAS

04.
PACKING

05.
PRICE CODE /
CÓDIGO DE TARIFA

06.
TECHNICAL DRAWINGS /
DIBUJOS TÉCNICOS

07.
RECOMMENDATIONS /
RECOMENDACIONES



4x12,5 cm / 1,6"x5"




BARS


12,5x25 cm / 5"x10"




Almond

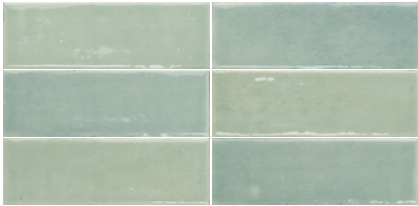


Gooseberry

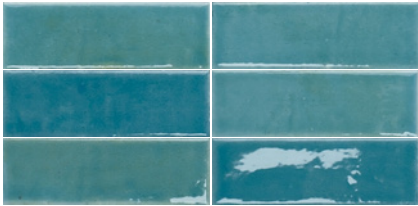


Cerulean

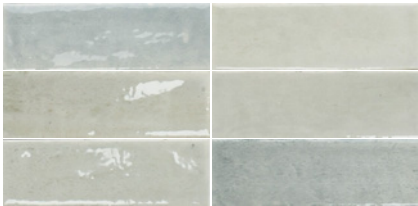


Taupe

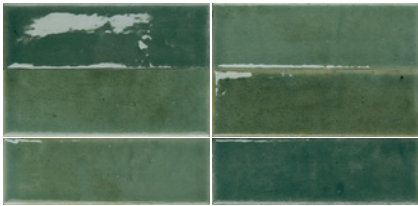


Dill Green

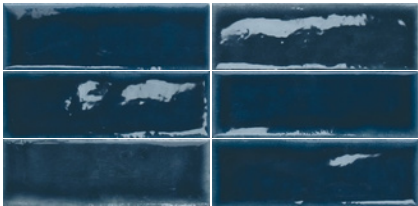

Lapis

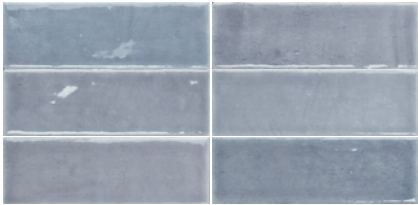

Pansy

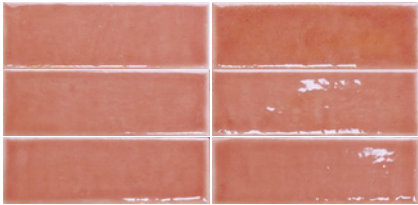


Rose



Almond




Gooseberry

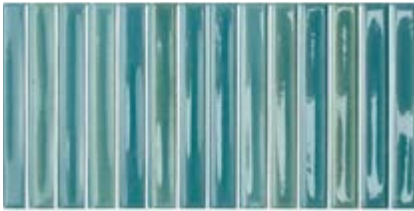

Cerulean



Taupe

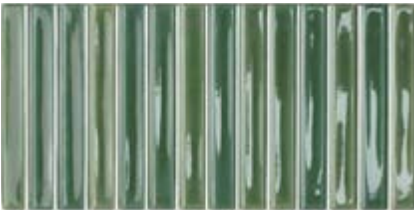

Dill Green





Lapis



Pansy



Rose

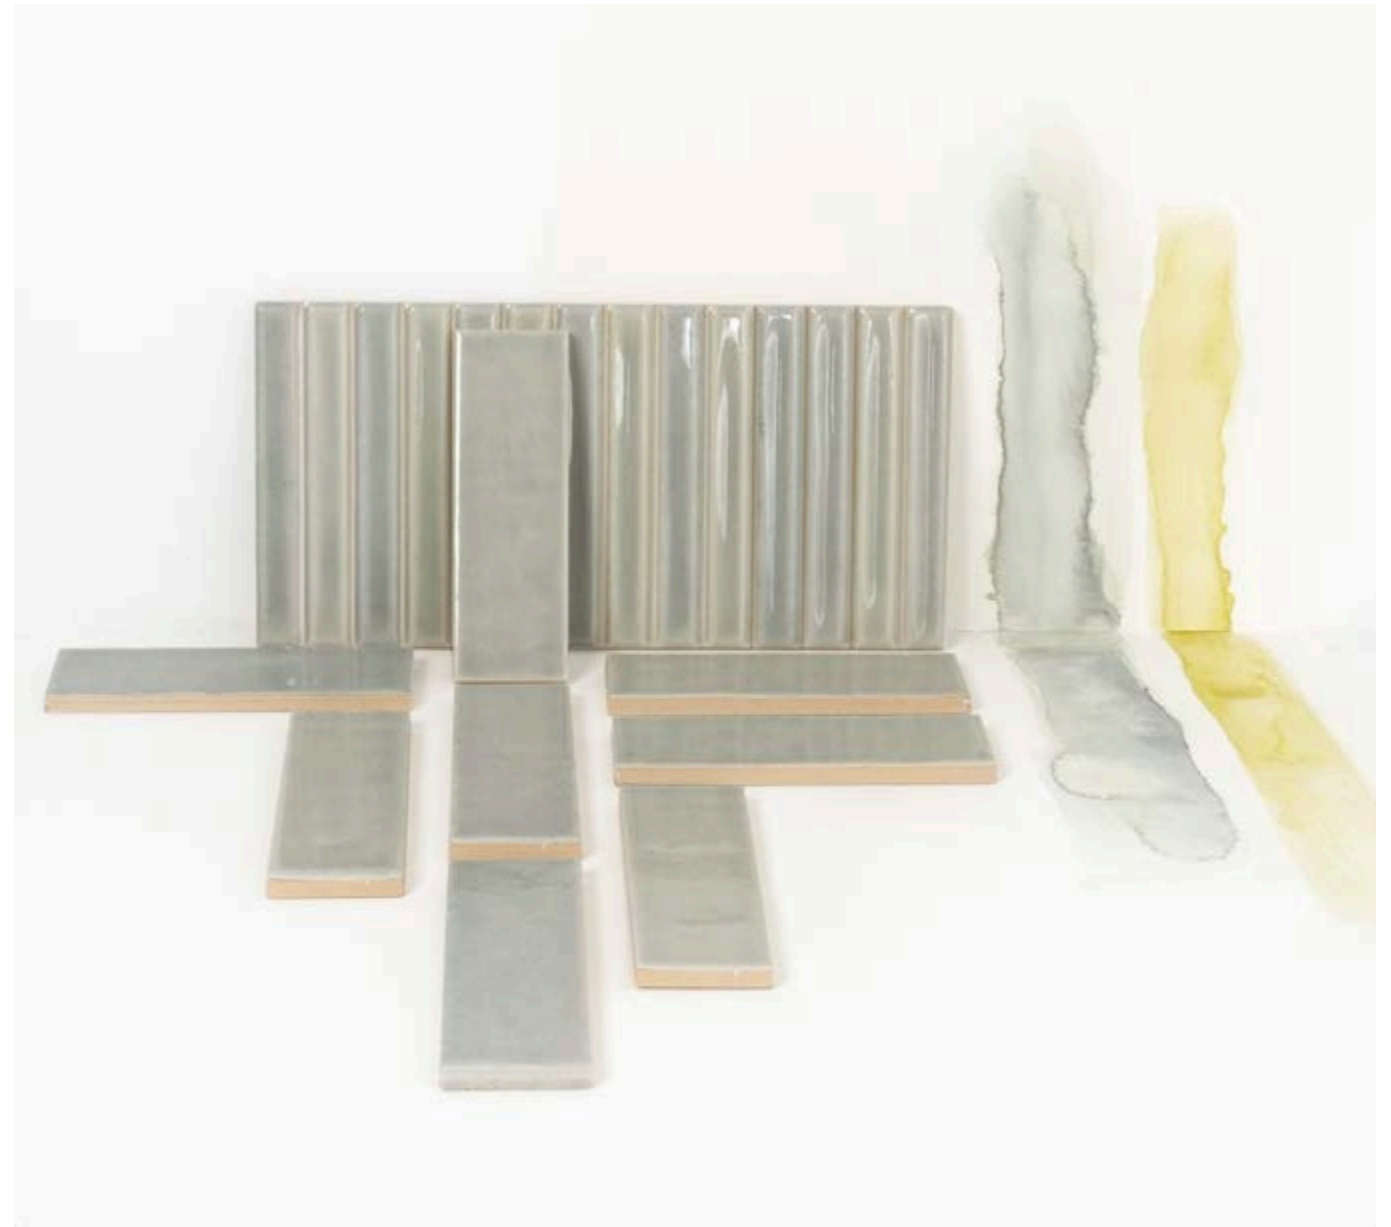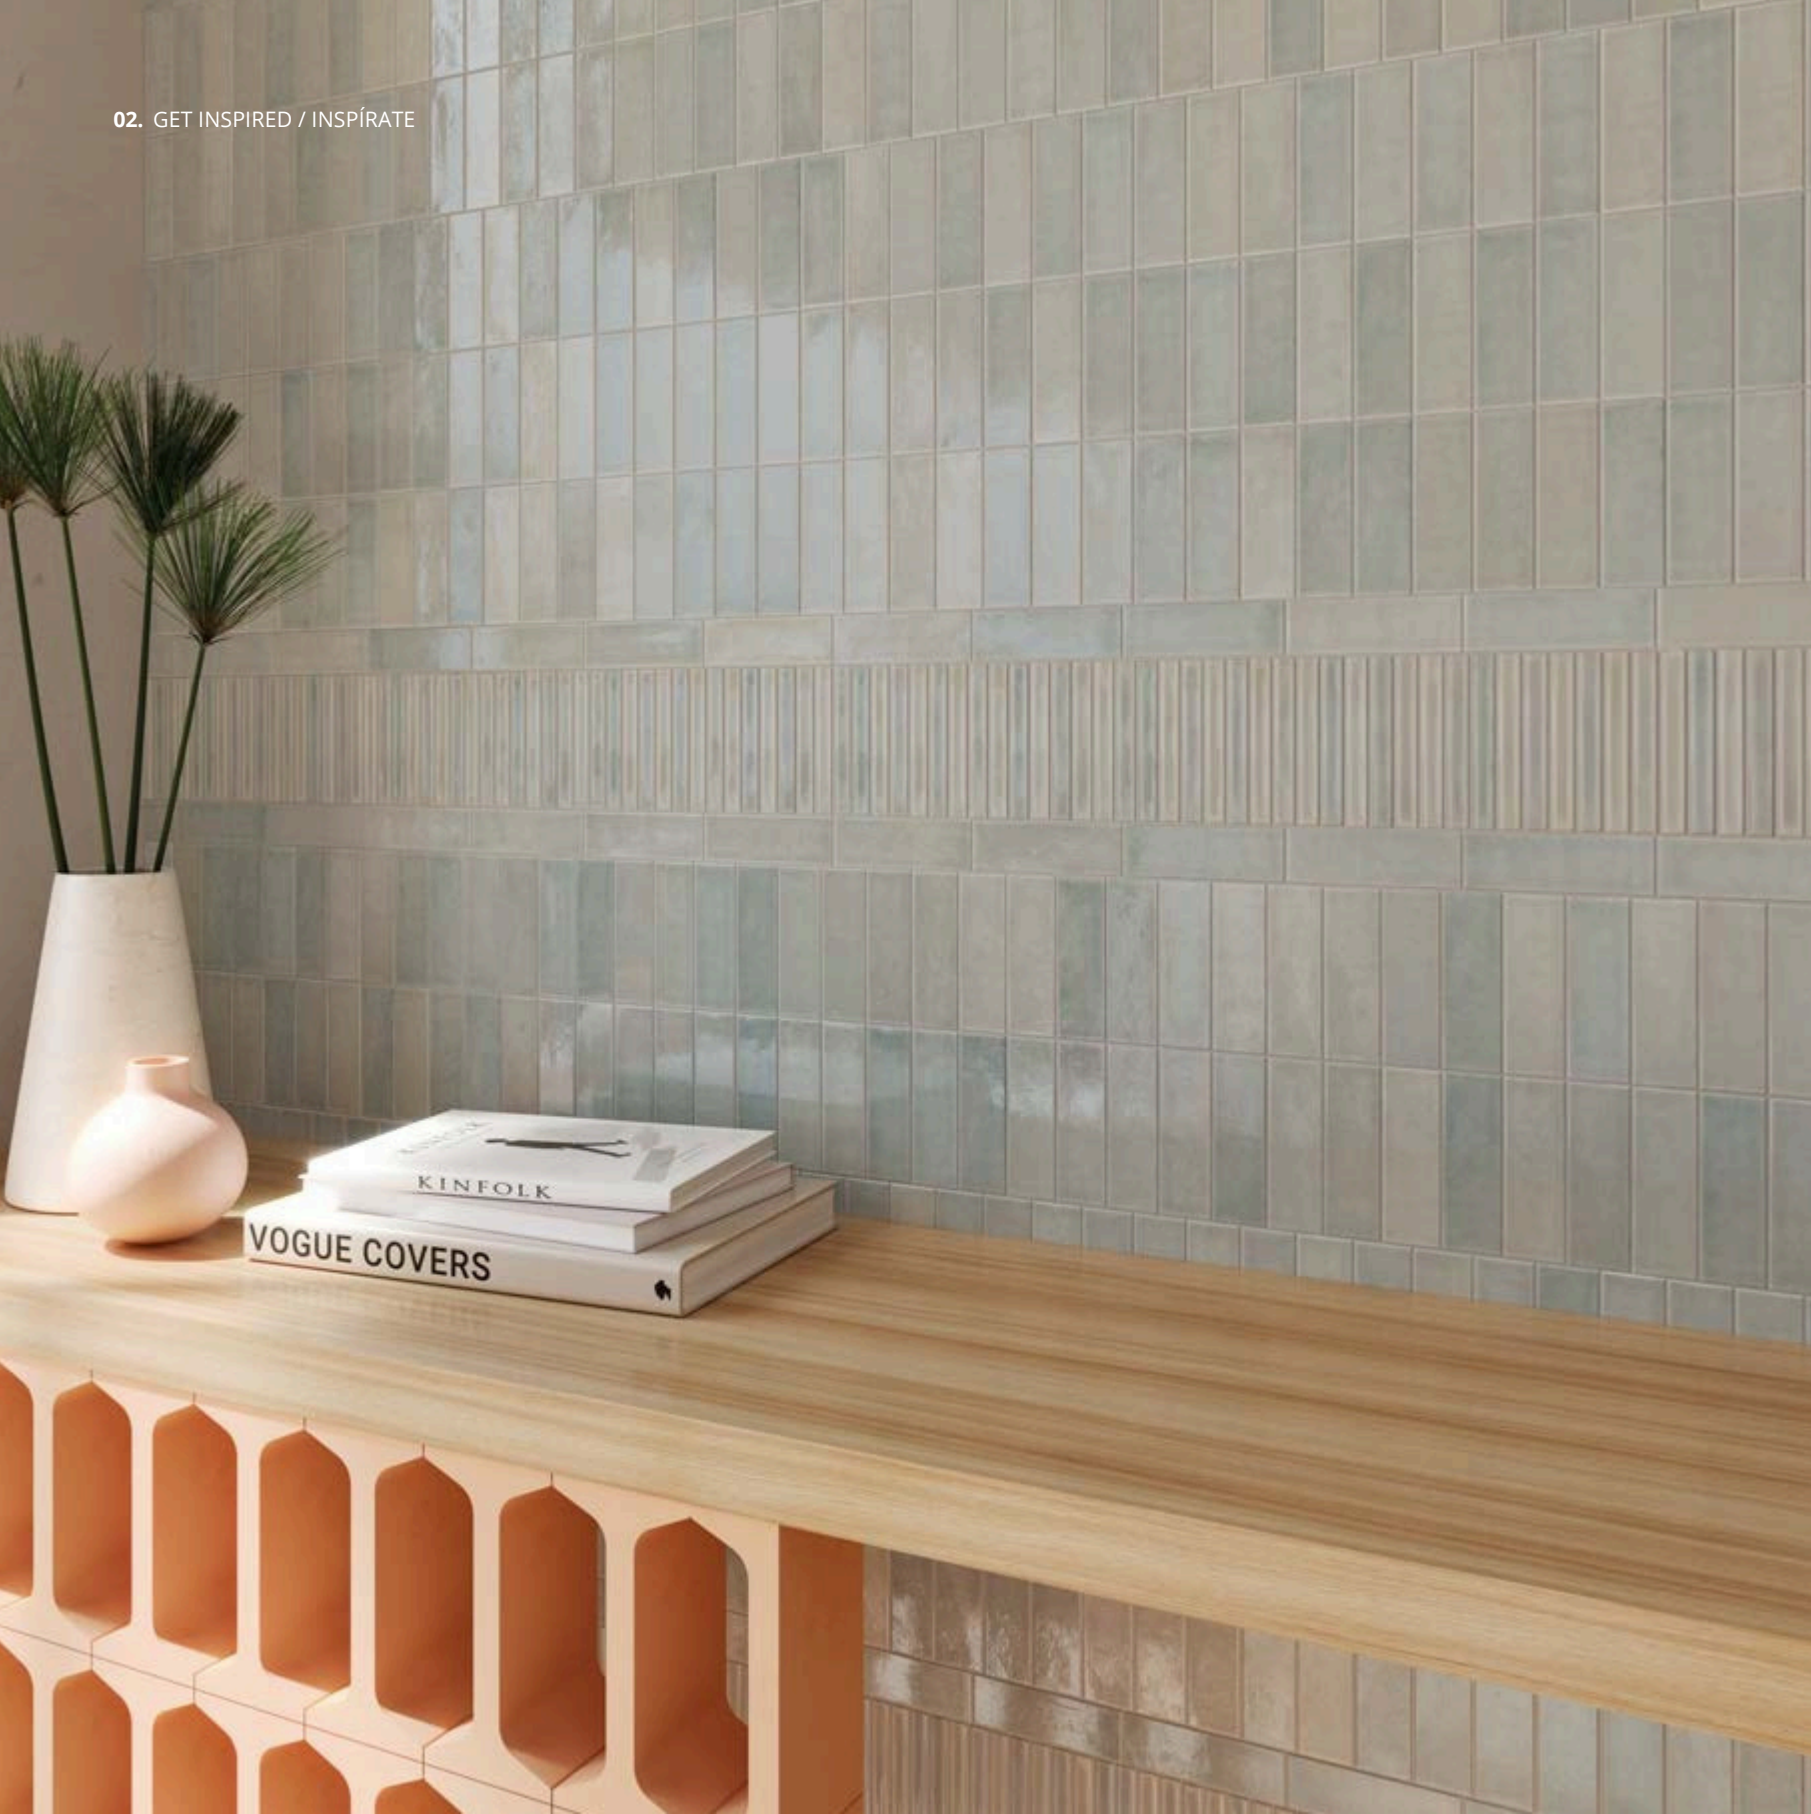


Taupe **Bars**
Taupe



Pansy **Bars**



Varnish

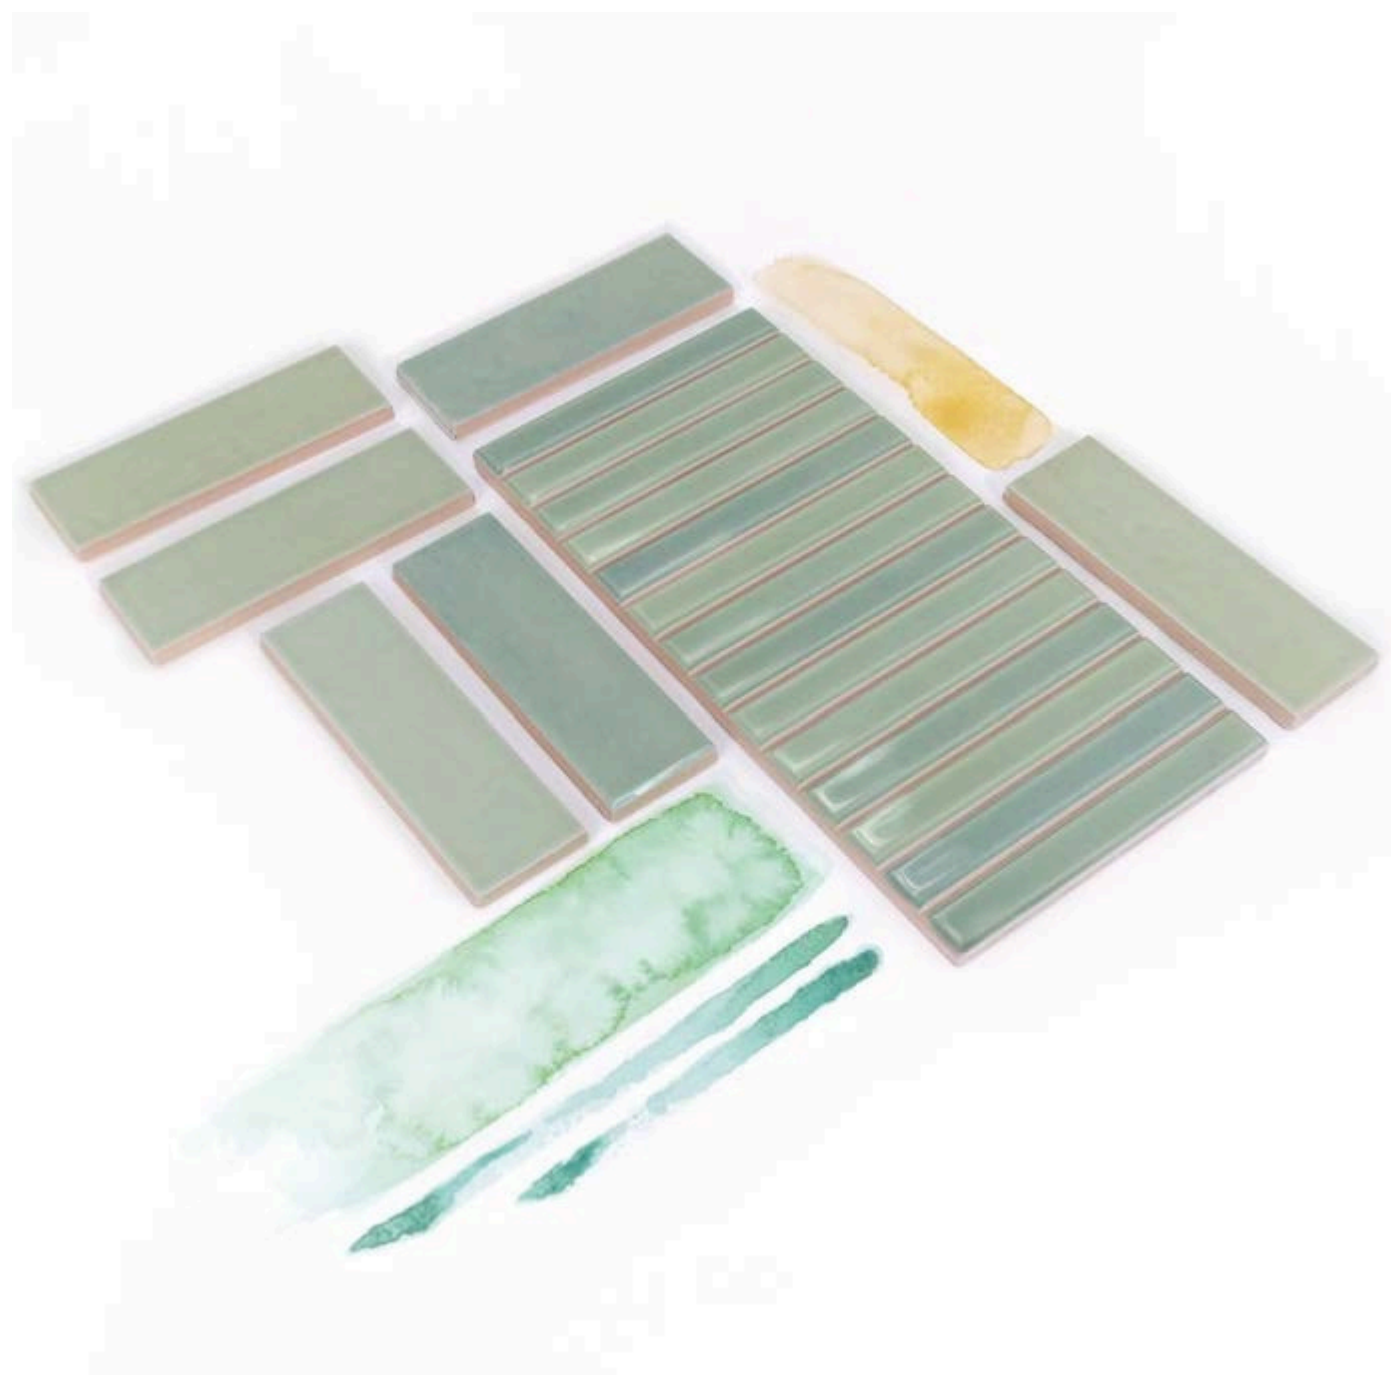

Gooseberry **Bars**
Gooseberry




Almond **Bars**
Almond



Bars Pansy



Almond 50% & Lapis 50%

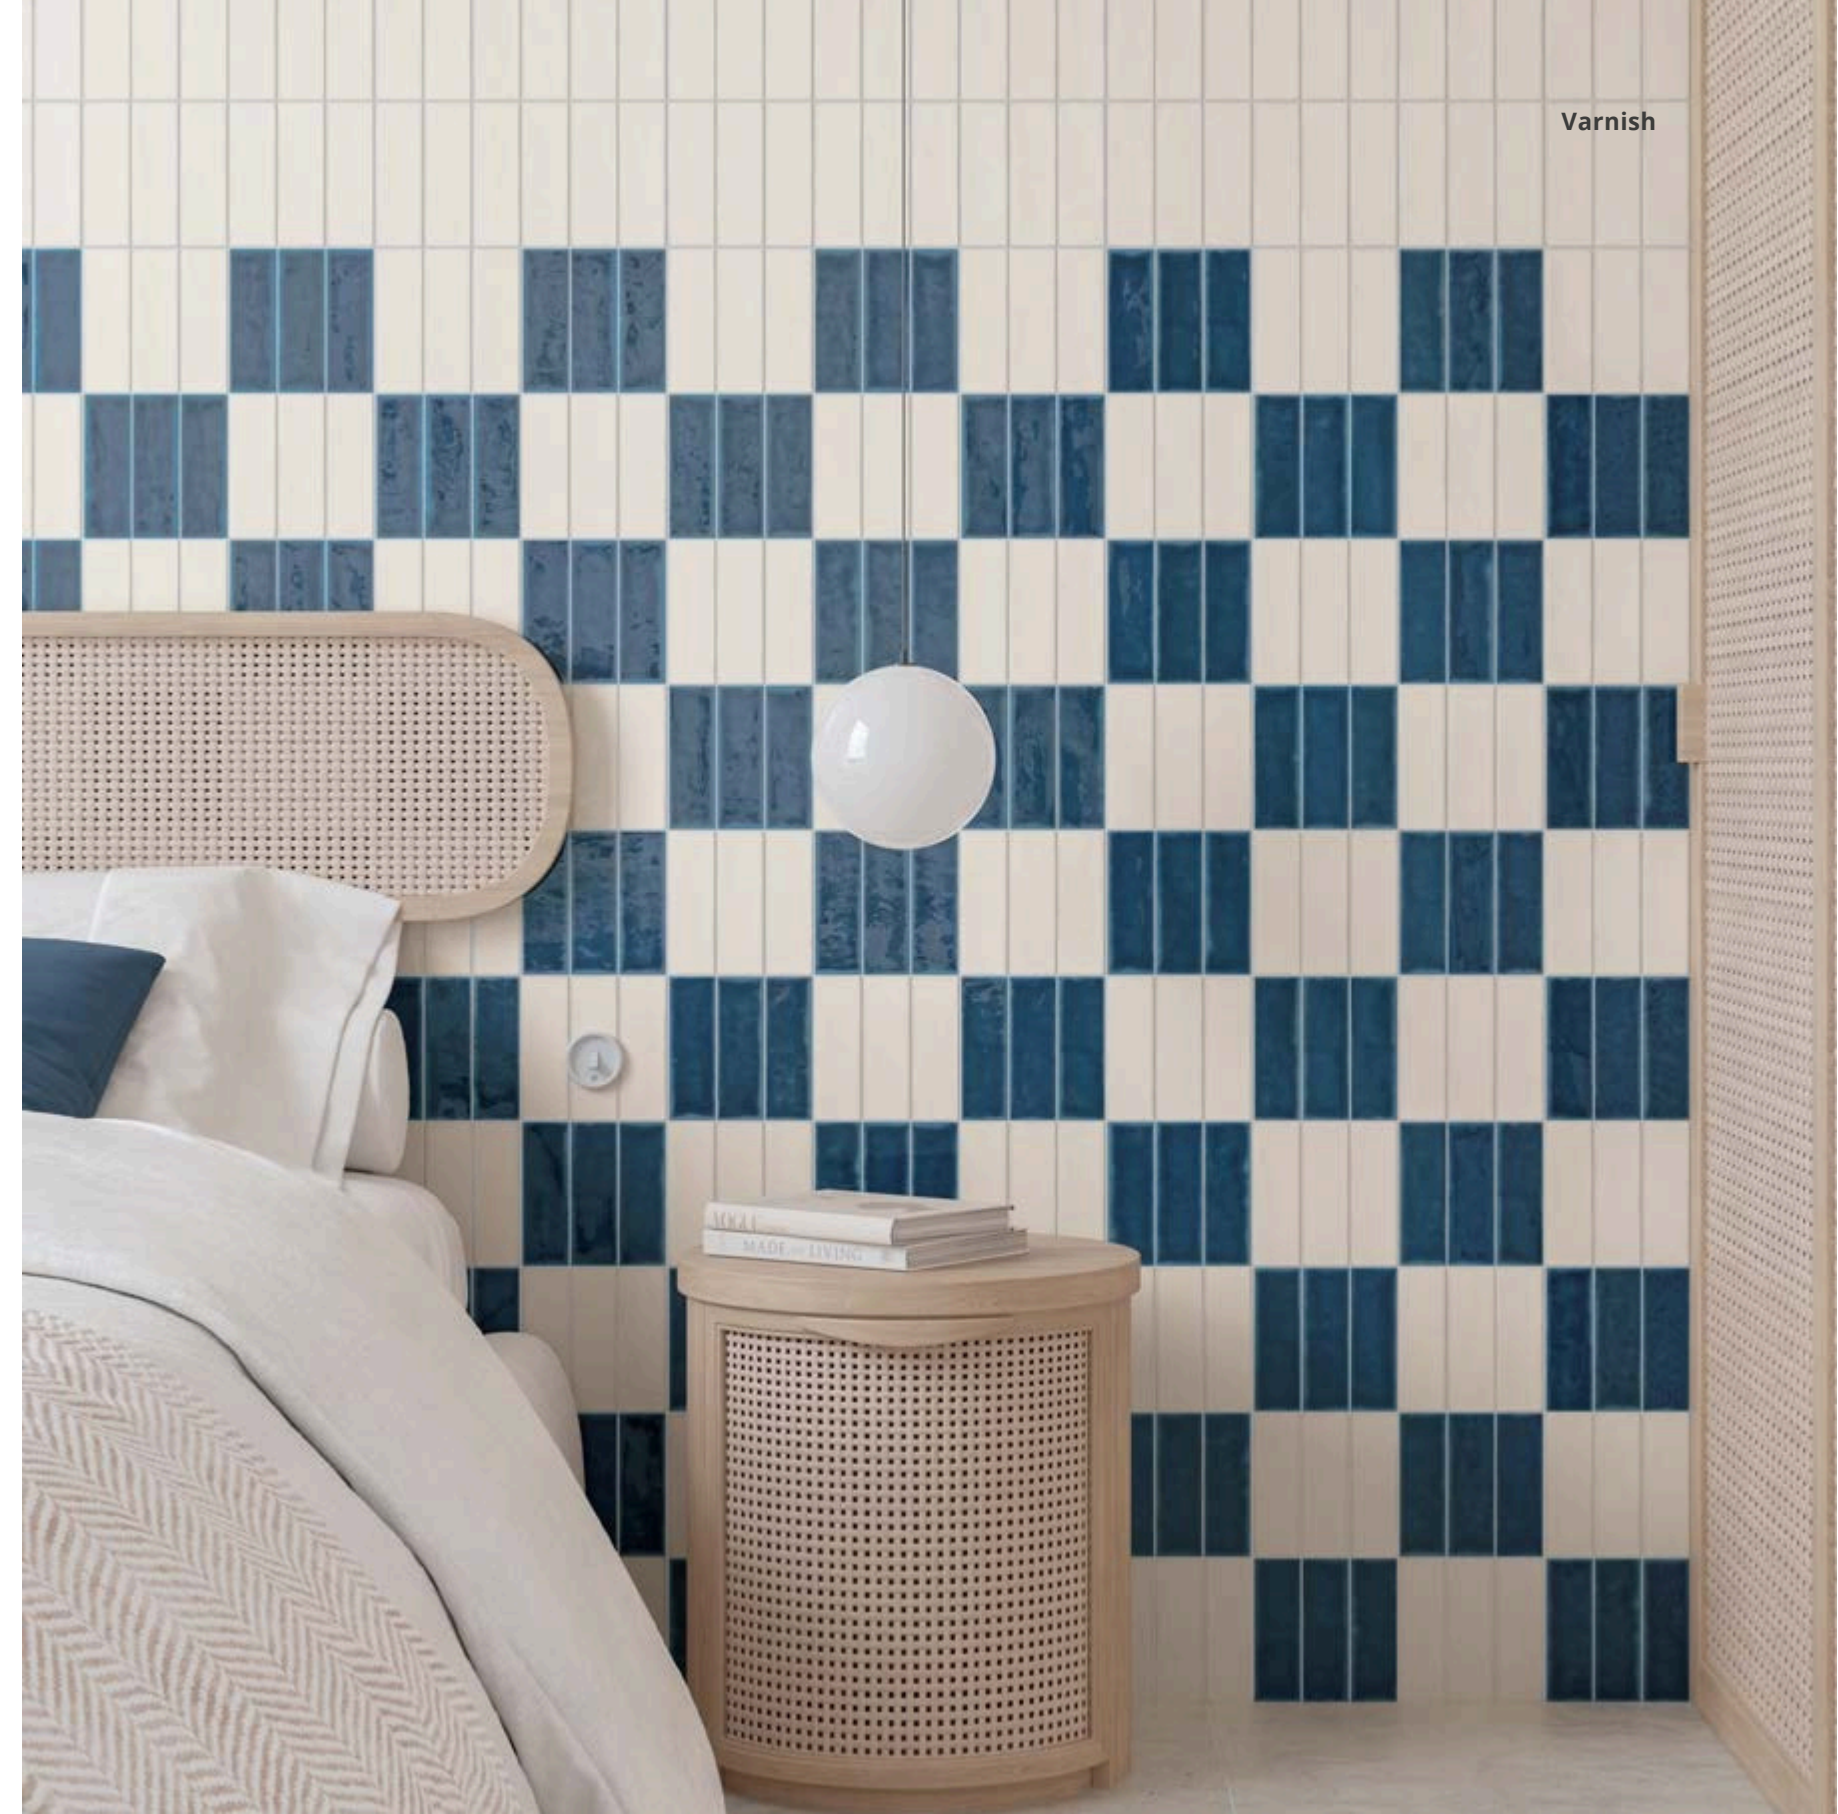

Varnish





Shelf Pattern: Almond 16,66%, Rose 16,66%, Gooseberry 16,66% & Dill Green 50%
Bench Pattern: Almond 25%, Rose 25%, Gooseberry 25% & Dill Green 25%








Almond 40,35%, Taupe 29,62%, Rose 14,19% & Lapis 15,84%




Varnish

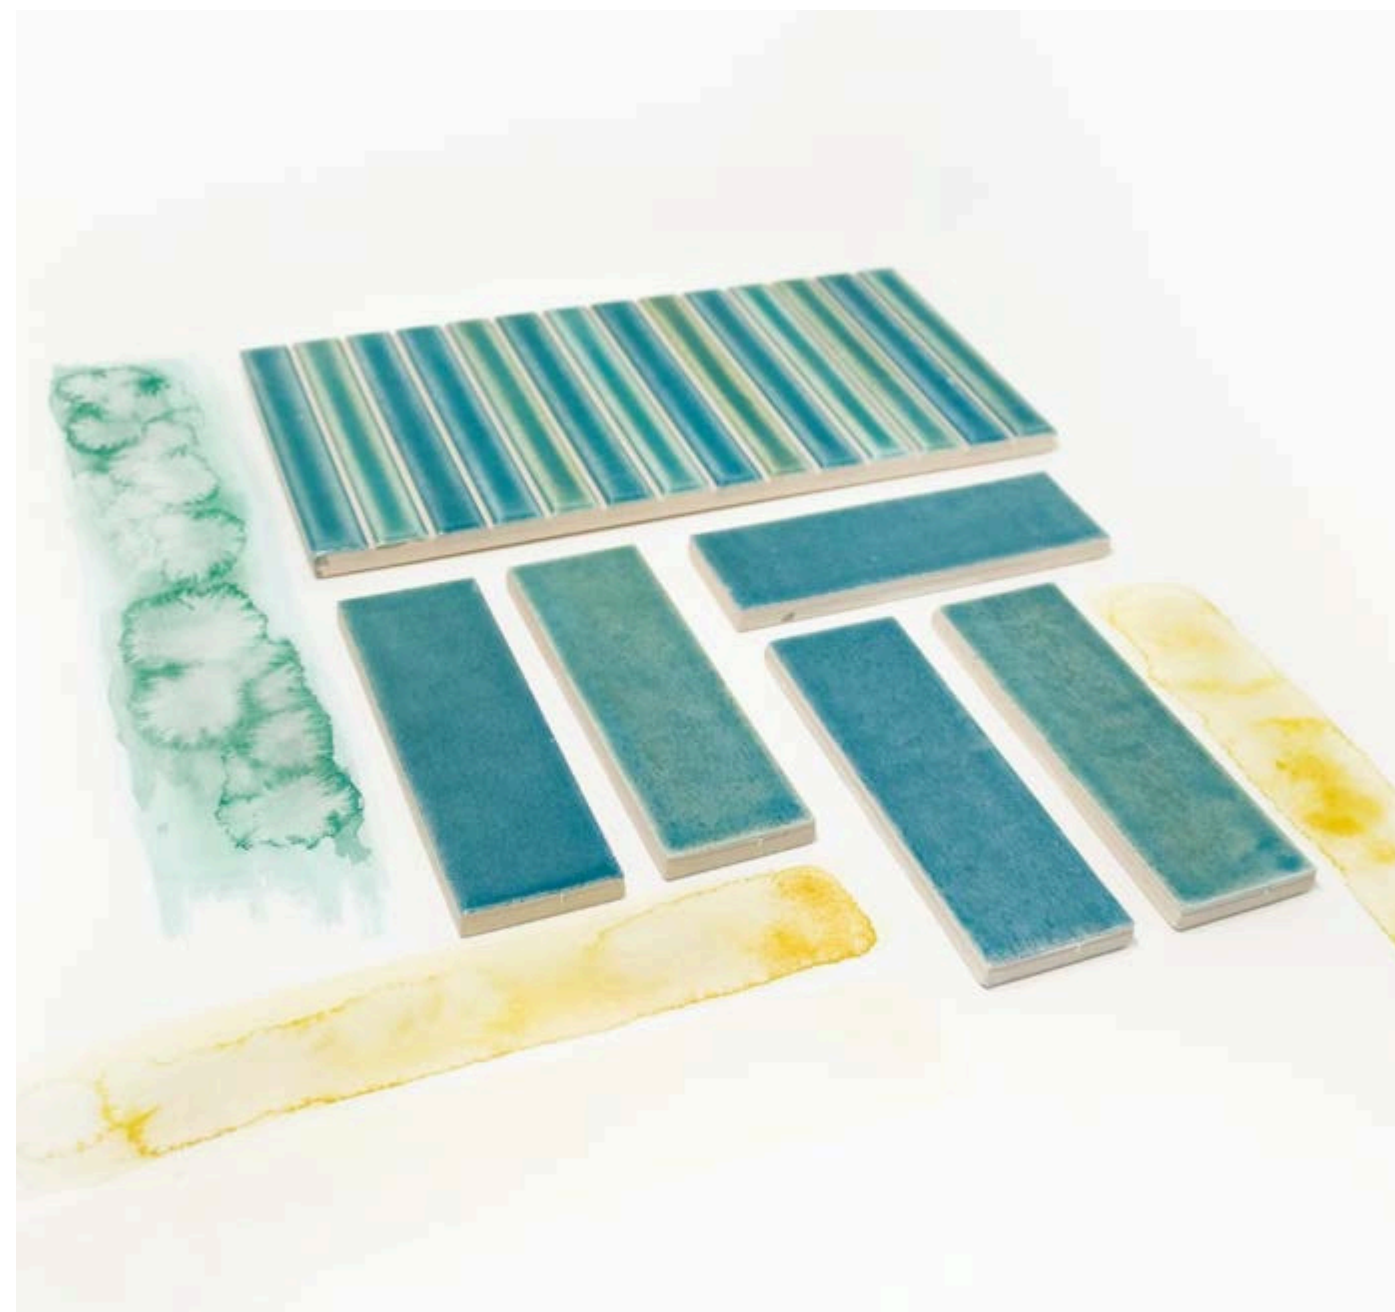

Cerulean **Bars**
Cerulean



HOW TO CREATE ROUNDED CORNERS

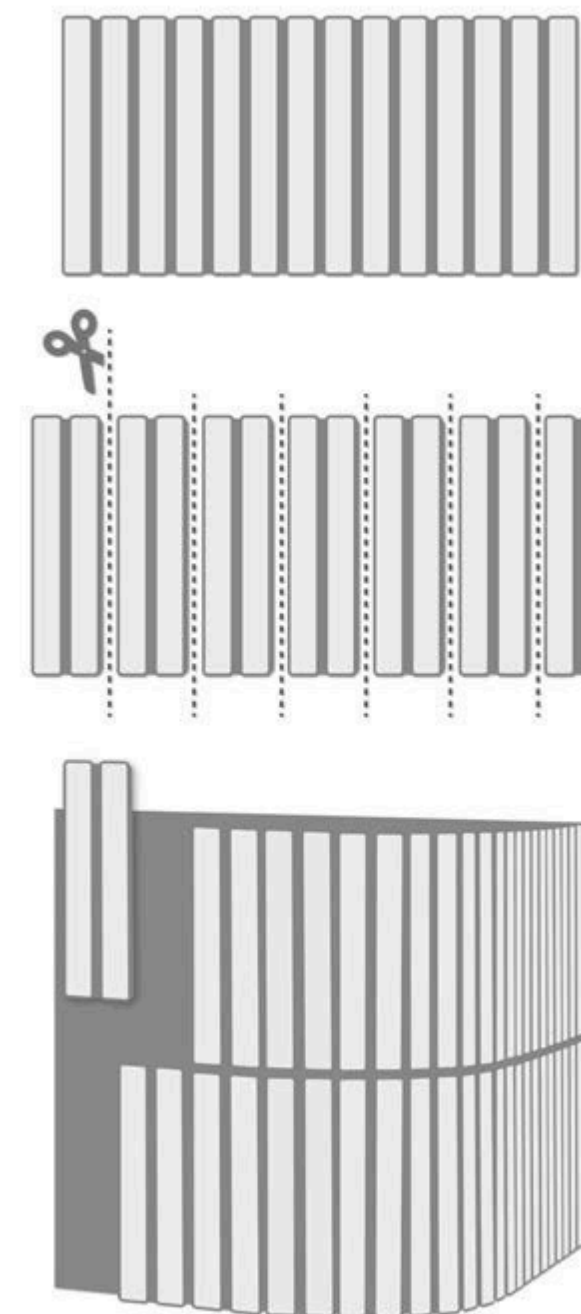

◀ Lapis Bars
Lapis

03. TECHNICAL FEATURES / INFORMACIÓN TÉCNICA

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%) Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)		
FEATURES / C AR AC TERÍS TIC A S	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	40 mm +/- 0,75 mm x 124 mm +/- 0,75 mm Bars 124 mm +/- 0,75 mm x 249 mm +/- 1,25 mm	UNE-EN ISO 10545-2:2019
 Water absorption	Eb>10%	UNE-EN ISO 10545-3:2018
 Modulus of rupture	≥ 12 N/mm2 ≥ 600 N	UNE-EN ISO 10545-4:2019
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
 Stain resistance	5	UNE-EN ISO 10545-14:2015
 Tone variation	V3	-
 White body ceramic	-	-


04. PACKING

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
Varnish	4x12,5 cm	114	8,05 kg	0,570 m2	102	58,140 m2
Varnish BARS	12,5x25 cm	14	7,30 kg	0,438 m2	138	60,444 m2

			LB 	FT2 		FT2 
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
Varnish	1.6"x5"	114	17.75 lb	6.135 ft2	102	625.770 ft2
Varnish BARS	5"x10"	14	16.09 lb	4.715 ft2	138	650.670 ft2

05. PRICE CODE

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
Varnish Varnish BARS	W23
	W32

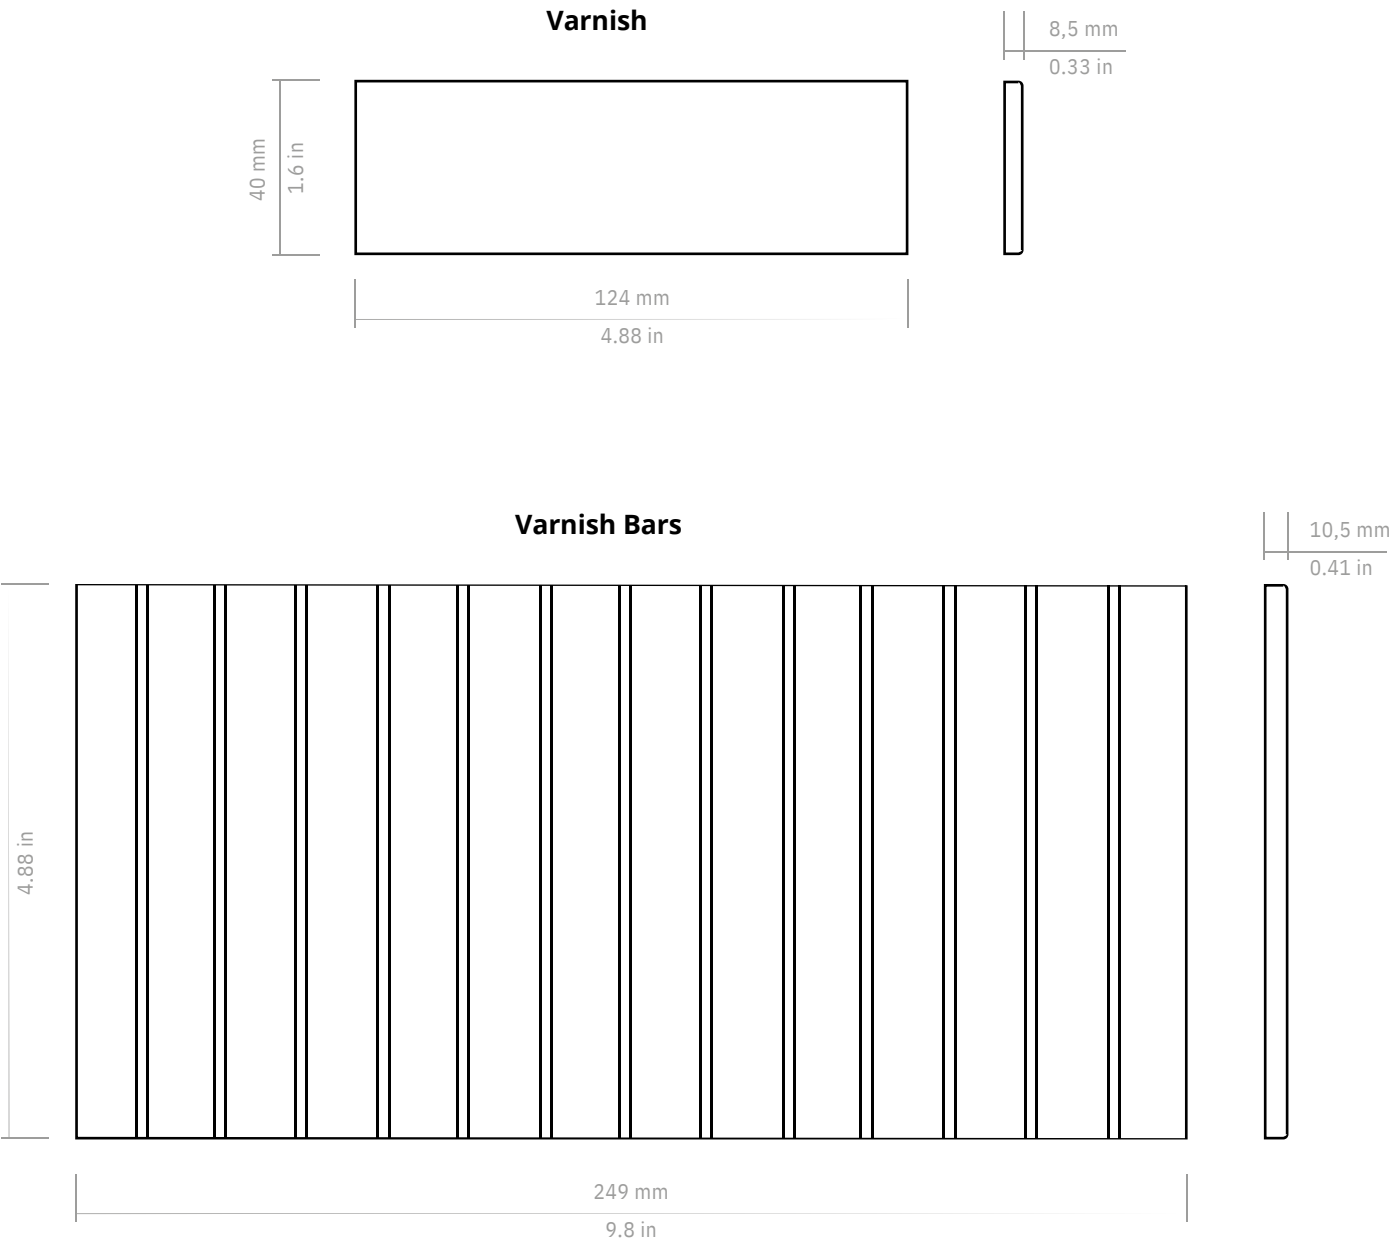

BEFORE INSTALLING THE PRODUCT

The surface where the product is being installed must be clean and level.
It is recommended that the layout of the product is prepared before the final installation.
Make sure you choose an adhesive apt for the area where the product is being installed.
For installation on porous surfaces we recommend: Kerakoll Special® Eco, and for Non-porous surfaces: Kerakoll serie H40® Eco.
The choice of quality grouting mortar is crucial.
We recommend Kerakoll Fugabella® Color.
(www.kerakoll.com)

TO ENHANCE YOUR WOW PRODUCT

In order to obtain the maximum WOW effect, use 1,5 mm - 0.059 in spacers between the tiles to maintain an even installation over the whole surface.
The colour of the grout should be as close as possible to the colour of your product.
Once the area has been grouted, and before the grout dries, remove any excess material with a damp sponge.
MAINTENANCE
Maintenance free. Easy and practical to care for, due to the high standard of technical characteristics in each WOW ceramic product.
Avoid abrasive or acidic cleaning products.
It is recommended to clean with clear water.

ANTES DE LA COLOCACIÓN

Preparar la superficie sobre la que se va a colocar tu producto WOW. Debe estar limpia y aplomada.
Se recomienda plantear la colocación, previo a su instalación.
Elegir el material de agarre en función de las características de la superficie.
Se recomienda para colocación general en superficies porosas: Kerakoll special® Eco. y para superficies no porosas como el pladur: Kerakoll serie H40® Eco.
Es importante la elección de un material de rejunte de calidad. WOW recomienda utilizar el material de rejunte Kerakoll fugabella® Color (www.kerakoll.com), cuyas características son especialmente adecuadas para este revestimiento.

PARA ENSALZAR EL ASPECTO DE TU PRODUCTO WOW

Se recomiendan separadores de 1,5 mm para colocar las piezas y conseguir de esta forma un aspecto WOW óptimo.
También es aconsejable que el color de rejuntado sea similar al color del producto elegido.
Una vez rejuntado el producto, y antes de que se endurezca, retirar el material sobrante de rejuntado con una esponja mojada en agua.
MANTENIMIENTO
Práctico y sencillo de limpiar, dadas las excelentes características técnicas del producto WOW, tan sólo es necesario un cuidado rutinario, evitando la utilización de productos abrasivos o ácidos.
Se recomienda limpiar exclusivamente con agua limpia.

MORE INFO:



Town & Country Surfaces
230 Fifth Avenue
Suite 1714
New York NY 10001

General Inquiries:
info@tncsurfaces.com
Phone: 212-679-0312

