


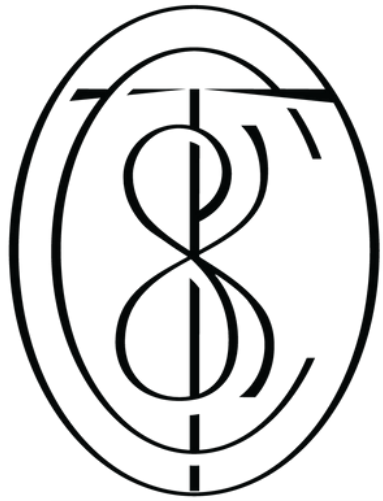

TOWN & COUNTRY

SURFACES

Model/ Series:
Size:
Colors:
Type:
Thickness:
Recycled Content:

PORCELANA
All Sizes All Colors
Available GLAZED
PORCELAIN 6 mm

- *Pre-Consumer

Technical Data	ASTM Test	ISO Test	Value Required ANSI	Declared ASTM
Water Absorption Break Strength	C373	ISO-10545/3	<=0.5%	<=0.5%
Scratch Hardness Chemical Resistance	C648	ISO-10545/4	>= 250	Min. 150
Frost Resistance Group Deep Abrasion	MOH's Scale	EN-101	-	6
- Unglazed Tiles PEI - Glazed Tiles***	C650	ISO-10545/13	Unaffected	Unaffected
Minimum Bond Strength (PSI) Dynamic	C1026	ISO-10545/12	Resistant	Resistant
Coefficient of Friction (DCOF) Shade	SEE FAQS	SEE FAQS	-	-
and Texture Rating Facial Dimensions	C1243	ISO-10545/6	<175 mm3	Pass
Range of Thickness Warpage Wedging	C1027	ISO-10545/7	-	-
	C482		>=50 psi	>=50
	A137.1	-	>=0.42	>=0.42
	CTDA "V"	-	-	V2
	C499	ISO-10545/2	1.5% Max	Pass
	C499	ISO-10545/2	0.040 Max	Pass
	C485	ISO-10545/2	0.75%	Pass
	C502	ISO-10545/2	1.0% Max	Pass

0

MORE INFO:



Town & Country Surfaces
230 Fifth Avenue
Suite 1714
New York NY 10001

General Inquiries:
info@tncsurfaces.com
Phone: 212-679-0312

