

TECHNICAL FEATURES

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)

FEATURES / CARACTERÍSTICAS		SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	KONA 62,0 mm +/- 0,75 mm x 125,0 mm +/- 0,75 mm ORIGATA 62,0 mm +/- 0,75 mm x 125,0 mm +/- 0,75 mm	UNE-EN ISO 10545-2:2019
	Water absorption	Eb>10%	UNE-EN ISO 10545-3:2018
	Modulus of rupture and breaking strength	≥ 12 N/mm2 ≥ 600 N	UNE-EN ISO 10545-4:2019
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:2017
	Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
	Stain resistance	Class 5	UNE-EN ISO 10545-14:2017
	Tone variation	V2	-
	White body	-	-

PACKING


			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
KONA	6,25x12,5 cm	76	8,10 kg	0,594 m2	102	60,588 m2
ORIGATA	6,25x12,5 cm	72	7,79 kg	0,563 m2	102	57,426 m2
ROUNDED EDGE	1,1x12,5 cm	20	0,40 kg	2,480 m	200	496 m

			LB 	FT2 		FT2 
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
KONA	2.5"x5"	76	17.857 lb	6.393 ft2	102	652.163 ft2
ORIGATA	2.5"x5"	72	17.174 lb	6.06 ft2	102	618.128 ft2
ROUNDED EDGE	0.43"x5"	20	8.818 lb	8.136 ft	200	1627.2 ft

PRICE CODE

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
KONA ORIGATA	W18
ROUNDED EDGE	W21
	WS3

TECHNICAL DRAWINGS

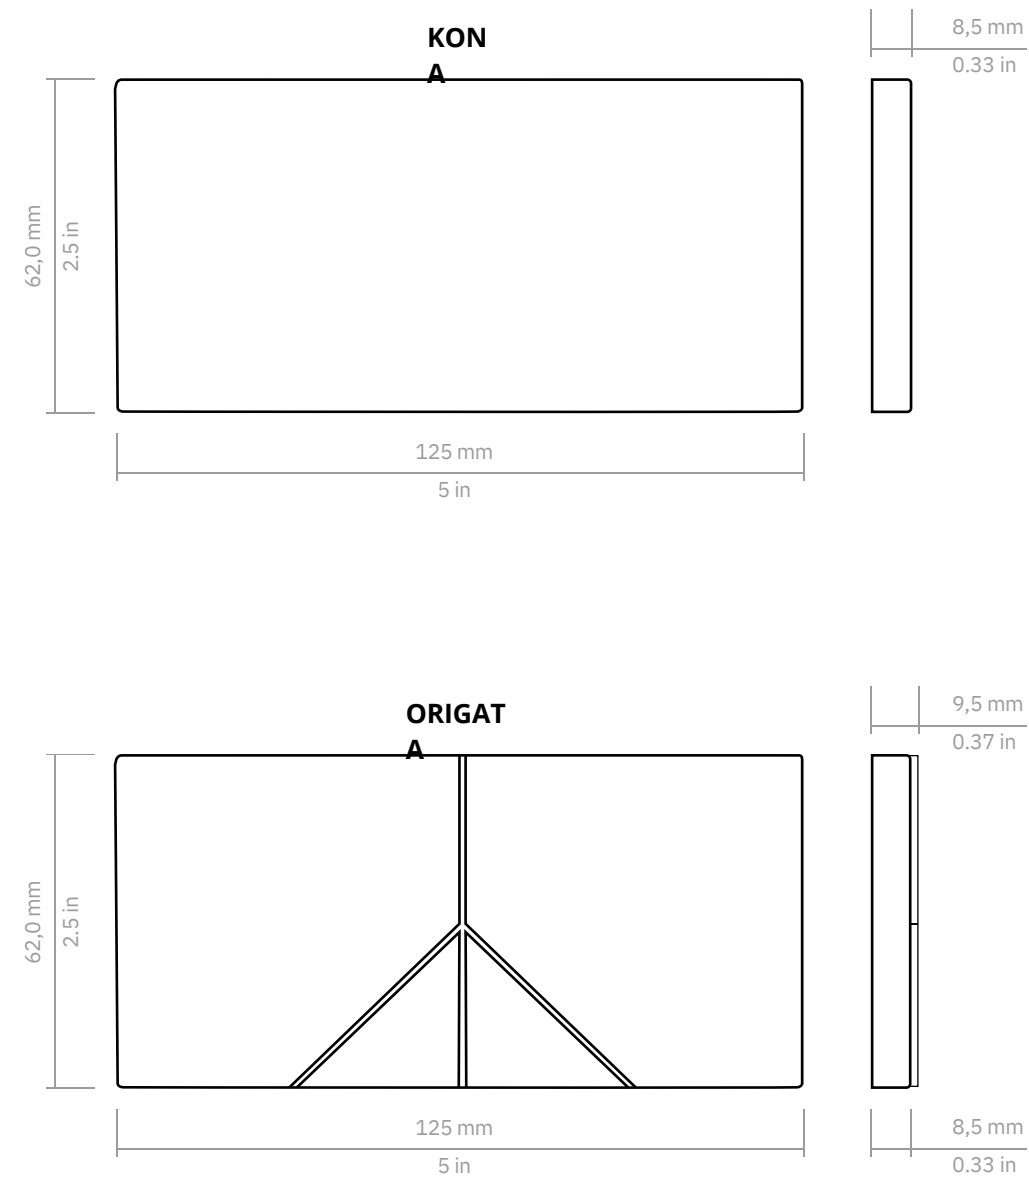

RECOMMENDATIONS

BEFORE INSTALLING THE PRODUCT

The surface where the product is being installed must be clean and level.
It is recommended that the layout of the product is prepared before the final installation.
Make sure you choose an adhesive apt for the area where the product is being installed.
For installation on porous surfaces we recommend: Kerakoll Special® Eco, and for Non-porous surfaces: Kerakoll serie H40® Eco.
The choice of quality grouting mortar is crucial.
We recommend Kerakoll Fugabella® Color.
(www.kerakoll.com)

TO ENHANCE YOUR WOW PRODUCT

In order to obtain the maximum WOW effect, use 1,5 mm - 0.06 in spacers between the tiles to maintain an even installation over the whole surface.
The following grout colors are recommended for each of the references: Fugabella 39 - Daisy and Bordo; Fugabella 26 - Moos, Onyx and Pewter; Fugabella 44 - Marine.
Once the area has been grouted, and before the grout dries, remove any excess material with a damp sponge.

MAINTENANCE

Maintenance free. Easy and practical to care for, due to the high standard of technical characteristics in each WOW ceramic product.
Avoid abrasive or acidic cleaning products.
It is recommended to clean with clear water.

MORE INFO:



Town & Country Surfaces
230 Fifth Avenue
Suite 1714
New York NY 10001

General Inquiries:
info@tncsurfaces.com
Phone: 212-679-0312