



TOWN &
COUNTRY
SURFACES



SEVILLE

Seville

The Seville technique allows for the creation of a unique texture with rich graphic details, by making cuts perpendicular to the stone's sedimentation direction. We love designing interiors that convey a sense of harmony between modernity and elegance. To achieve this, Seville has been crafted in three tones and various formats, ensuring it adapts perfectly to any space. An emotional connection with the raw material.

01. SIZES, COLOURS AND FINISHES	pag. 4
02. GET INSPIRED	pag. 6
03. TECHNICAL FEATURES	pag. 28
04. PACKING	pag.29
05. PRICE CODE	pag. 29
06. TECHNICAL DRAWINGS	pag. 30
07. RECOMMENDATIONS	pag. 31



Seville XXL

44x44 cm / 17.2"x17.2"

P \$ W20



Sand



Beige



Grey

Seville XL

22x44 cm / 8.6"x17.2"

P \$ W20



Sand



Beige



Grey

Seville Strip

4,6x37,5 cm / 1.8"x14.5"

P \$ W20



Sand



Beige



Grey

Seville S

11x11 cm / 4.3"x4.3"

P \$ W20



Sand



Beige



Grey

Seville O

5x15 cm / 2"x6"

P \$ W27



Sand



Beige



Grey




NO LIMITS!

This collection has been created using a specially formulated matt enamel for use both indoors and outdoors. Thanks to an innovative non-slip surface R11 / Class 3 / DCOF > 0.75, Seville can be installed in wet areas. However, its soft-touch finish makes it suitable for interior use, allowing for aesthetically uniform spaces. One product, unlimited uses.

Seville Grey ►

Seville



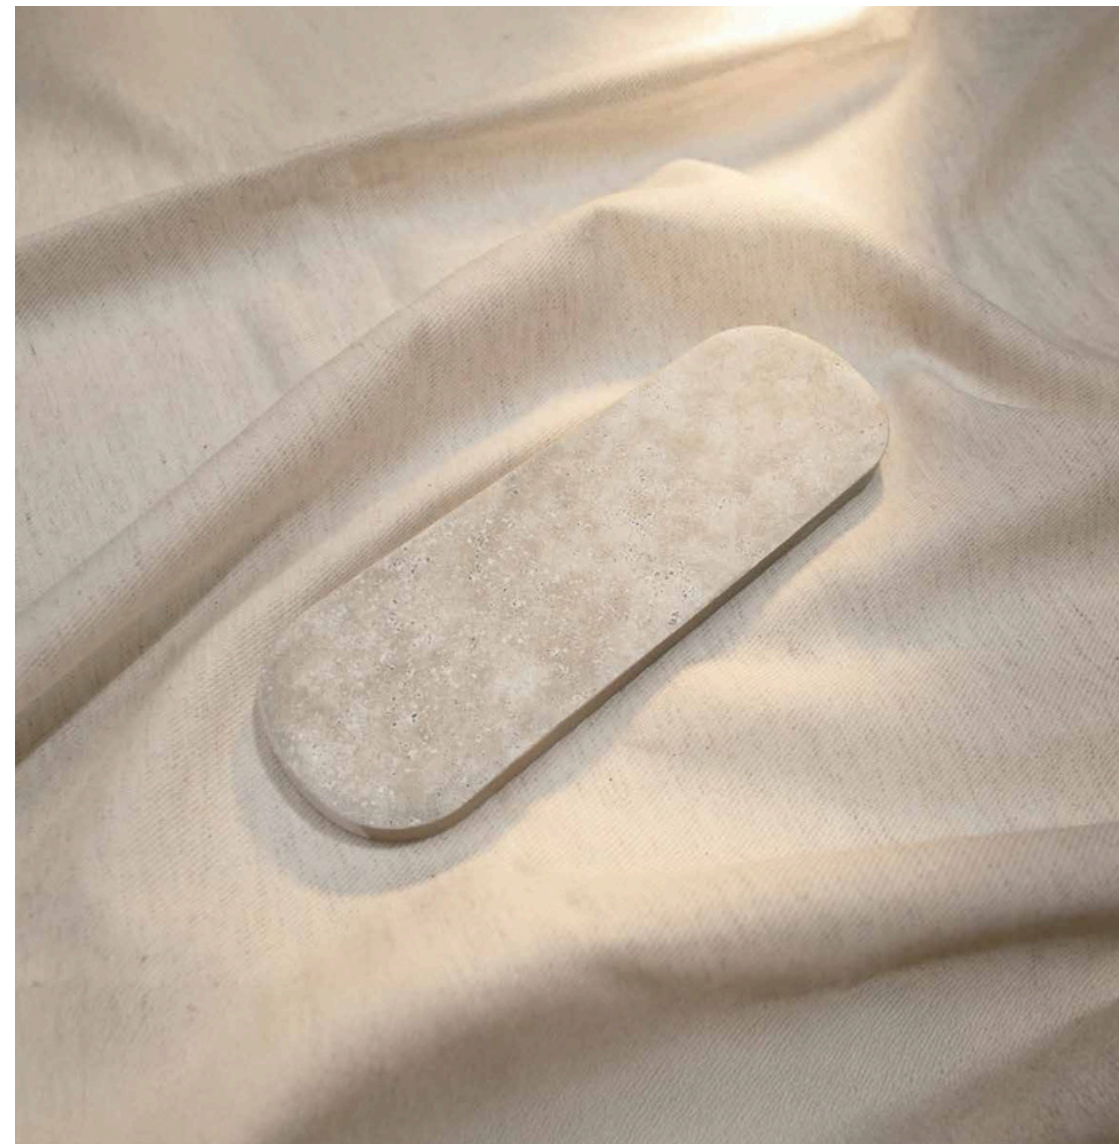

Seville O Sand



▲ **Seville O** Grey **Seville S** Grey
Floor: Seville XXL Grey

Seville XXL Sand **Pool:** ►
Seville S Sand





Seville S Beige Floor:

Seville XXL Beige



▲ **Seville** Grey

Seville XL Grey 40% & **S** Grey 60%
Floor: Seville XL Grey **Pool: Seville S** Grey





Seville Sand Seville S Sand Seville XXL Sand Lattice:
Reef Sand, Narrow Reef Sand (Reef Collection) &
Seville S Sand



▲ **Seville O** Beige **Seville**
Beige **Floor: Seville XXL**
Beige

Seville XL Beige **Pool:** ►
Seville S Beige





Seville XL Grey
Seville Grey



▲ **Seville XXL** Sand 60%
Seville S Sand 40%

Seville XL Sand





Seville S Grey **Floor:**

Seville XXL Grey



▲ **Seville XL Sand Pool:**
Seville S Sand Wall:
Seville O Sand

Seville XXL Beige Wall: ►
Seville O Beige





Seville Grey **Pool:**

Seville S Grey















Seville Beige 95%
Seville O Beige 5%






03. TECHNICAL FEATURES

Dry-pressed porcelain tiles with water absorption B la ≤ 0,5% for interior and exterior floors and walls.

FEATURES / C A R A C T E R Í S T I C A S		SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	48,0 mm +/- 0,5 mm x 148,0 mm +/- 0,9 mm 110,0 mm +/- 0,9 mm x 110,0 mm +/- 0,9 mm 47,0 mm +/- 0,5 mm x 374,0 mm +/- 2 mm 222,0 mm +/- 1,3 mm x 446,0 mm +/- 2 mm 446,0 mm +/- 2 mm x 446,0 mm +/- 2 mm	UNE-EN ISO 10545-2:2019
	Water absorption	$E_b \leq 0,5\%$	UNE-EN ISO 10545-3:2018
	Modulus of rupture	Minimum 35 N/mm2 Individual Minimum 32 N/mm2	UNE-EN ISO 10545-4:2019
	Abrasive resistance	PEI 3	UNE-EN ISO 10545-7:1999
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Frost resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:2017
	Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
	Stain resistance	5	UNE-EN ISO 10545-14:2015
	Non-slip value	R11 / CLASS 3 / DCOF >0,60	UNE-EN ISO 16165:2022 ANSI A137.1:2012
	Tone variation	V5	-
	Porcelain tile	-	-

04. PACKING


			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
Seville O	5x15 cm	66	9,27 kg	0,469	100	46,90 m2
Seville S Seville	11x11 cm	30	8,04 kg	m2	125	45,375 m2
Seville XL Seville	4,6x37,5 cm	15	5,88 kg	0,363	120	31,08 m2
XXL	22x44 cm	8	16,56 kg	m2	36	27,864 m2
	44x44 cm	4	17,31 kg	0,259	36	27,864 m2

				m2		
				0,774		
				m2		
			LB 			FT2 
Model	Format (in)	Piezas / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
Seville O	2"x6"	66	20.434 lb	5.058 ft2	100	505.859
Seville S Seville	4.3"x4.3"	30	17.725 lb	3.907 ft2	125	ft2
Seville XL Seville	1.8"x14.5"	15	12.976 lb	2.785 ft2	120	488.375
XXL	8.6"x17.2"	8	36.507 lb	8.331ft2	36	ft2
	17.2"x17.2"	4	38.159 lb	8.331 ft2	36	334.707

05. PRICE CODE

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
Seville O Seville	W27
S Seville Seville	W20
XL Seville XXL	W20
	W20
	W20

06. TECHNICAL DRAWINGS

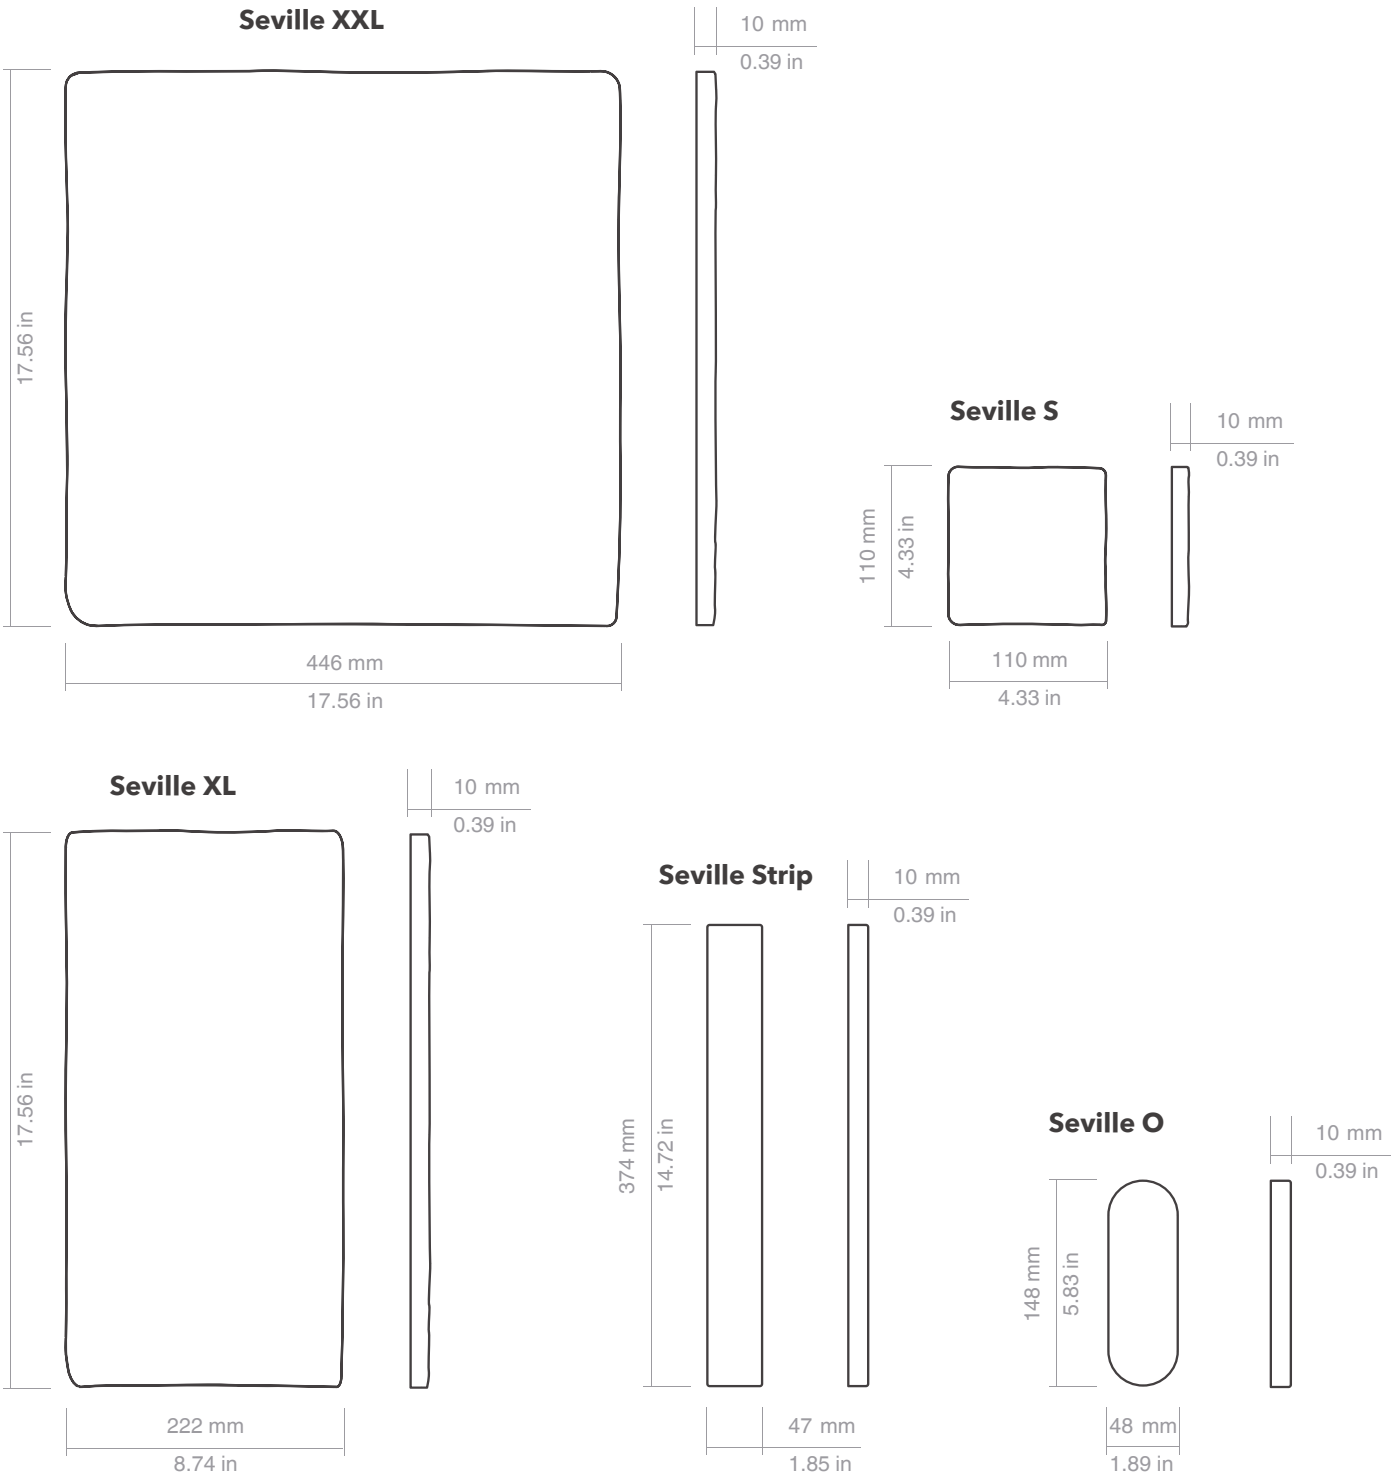


07. RECOMMENDATIONS

WAREHOUSING In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion. Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result we advise to use 2 mm (0.08”) grout.

MAINTENANCE AND CLEANING Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes. As a general guideline, powder detergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

WARNING! This collection reproduces traditional hand made tiles, this is the reason why there are slight dimentional differences between pieces (variable lengths and widths), which are part of the intended aesthetic. It is advised to adjust each one of the pieces in the process of installation due to the dimentional differences, instead of using spacers. As a result, these differences give the character, craftsman feel and a high aesthetic value.

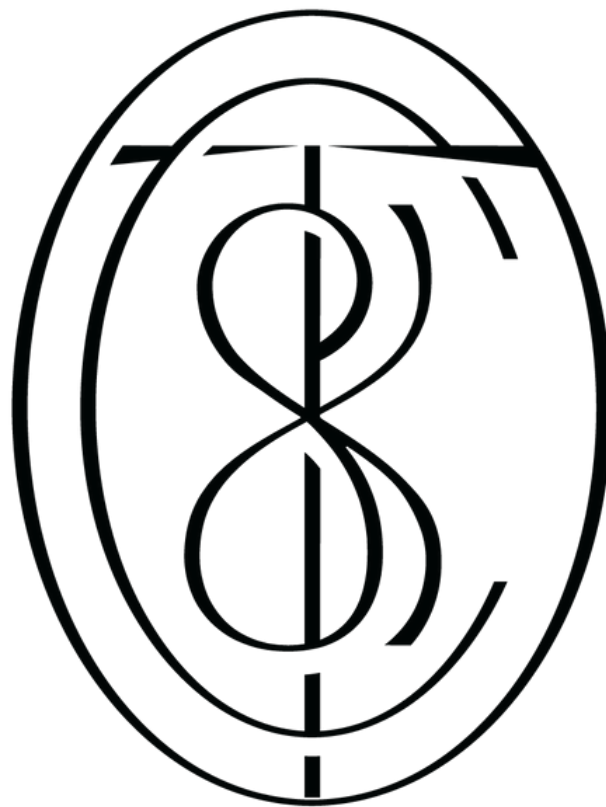

MORE INFO:



Town & Country Surfaces
230 Fifth Avenue
Suite 1714
New York NY 10001
General Inquiries:
info@tncsurfaces.com
Phone: 212-679-0312

