



Sauvage

Sauvage


Imagined to surpass limits. To reach the frontier of technical and aesthetic innovations and possibilities. That was the guiding principle in the development of this new surface.

A fusion of the strength of natural stones with the warmth of leather and the elegance of gold gave rise to Sauvage, with its designs, reliefs, protrusions, textures, and predominant tones between black and brown.

Sauvage is born to be timeless, for projects and individuals who dream of boldness. In 120x270 and 120x120 formats, use it whole or in cuts. Use it at home, for leisure, and at work.


Sauvage Porcelain, the beauty of creativity and technology revealed.



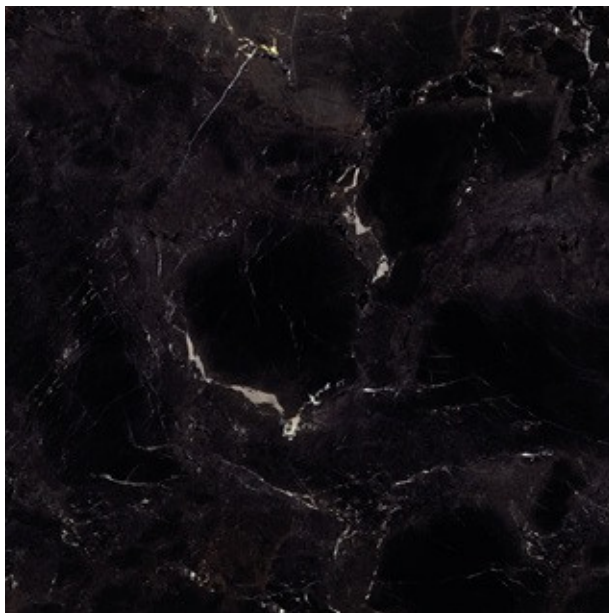


Cinder **48x106 NAT RECT**



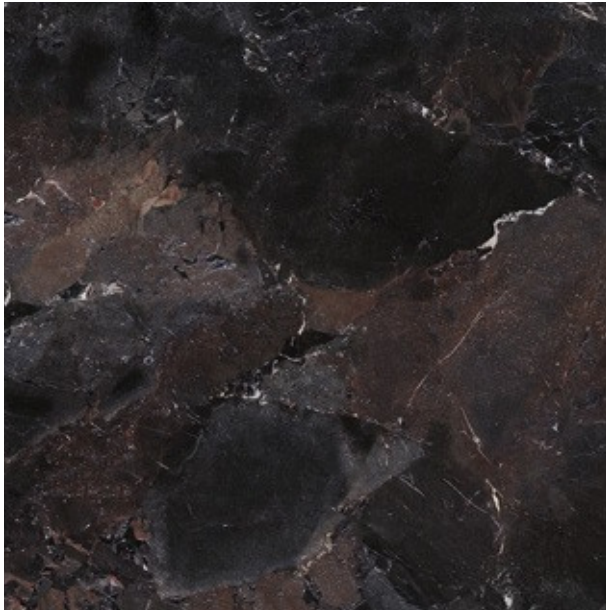


Cinder 48x48 NAT RECT ST



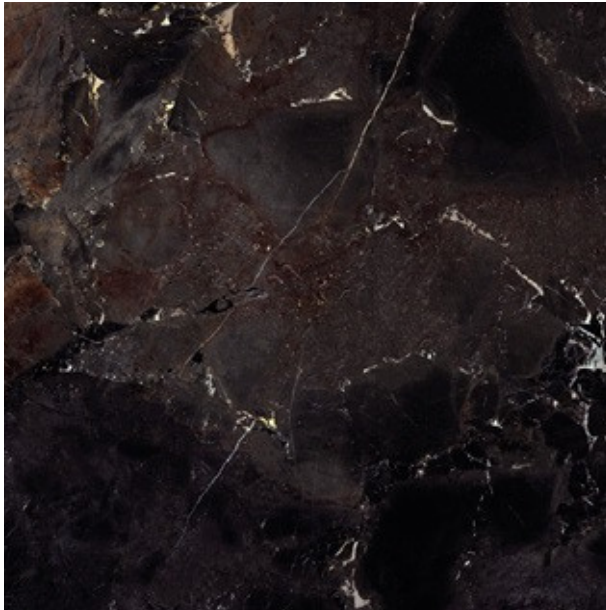

Sauvage 24x48 NAT RECT



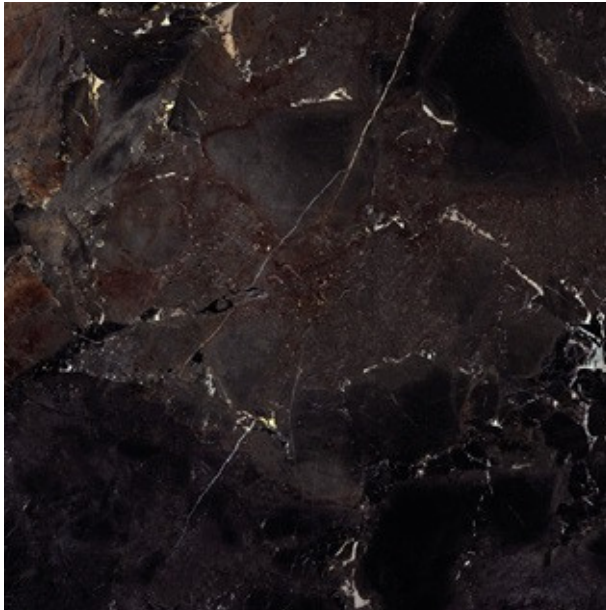


Cinder **24x48 POL RECT**




Available Sizes
Formatos Disponibles


Small Formats / Wall Tile



Special Pieces

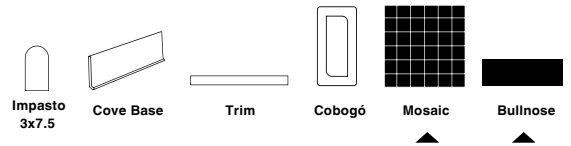

Large Format Wall Tile

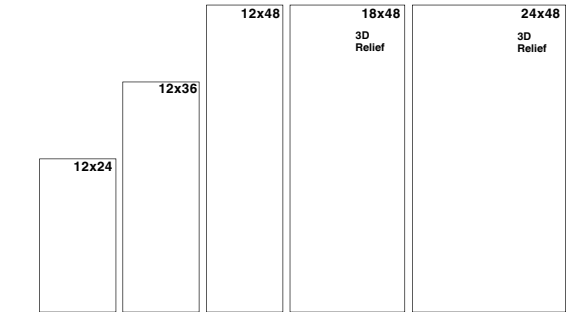

Available Edges
Bordes Disponibles


RECTIFIED
RECTIFICADO



PRESSED
PRENSADO



Porcelain Tiles

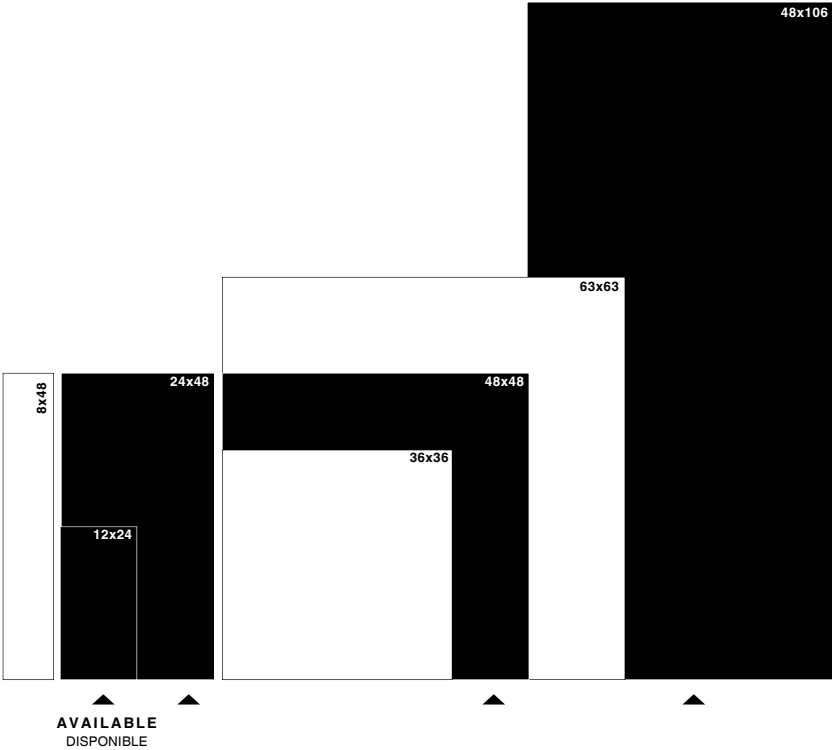

Available Finishes
Acabados Disponibles

POLISHED
PULIDO



MATTE
MATE



GLOSS
BRILLANTE



EXTERIOR
EXTERIOR




3D RELIEF
RELIEVE 3D



Sauvage

ColorBodyGlazed Porcelain Tile

Cinder | V3



Size	SKU	Finishes
Formato		Acabados
48x106	#206295E	NAT RECT ST
48x48	#203984E	NAT RECT ST
24x48	#900620E	NAT RECT
12X24	#900600E	POL RECT
	#900609E	NAT RECT
3x12	#900617E	POL RECT
Bullnose	#80664ET	NAT RECT
	#80665ET	POL RECT

Mos Facets
1.5x1.5 | V3



Mos Marquet
3x3 | V3



Size	SKU	Finishes
Formato		Acabados
12x12	#80642ET	NAT
Mos Facets	#80676ET	POL
12x12	#80643ET	NAT
Mos Marquet	#80530ET	POL



Sauvage

ColorBodyGlazed Porcelain Tile

TECH DATA

 Finish	 Freeze Resistant	 Shade Variation	 Color Body	 Water Absorption	 Stain Resistant	 DCOF AcuTest	 Chemical Resistant	 Breaking Strength	 Mohs Hardness
NAT	Resistant	V3	√	≤0.5%	Class A	≥0.42	Class A	≥275 lbf	7
POL	Resistant	V3	√	≤0.5%	Class E	<0.42	Class E	≥275 lbf	5

AREAS OF USAGE

Classification	Reference Category	Suitable
Interior, Dry	ID	√
Interior, Wet	IW	√
Interior, Wet Plus	IW+	√ Mos NAT
Exterior, Wet	EW	
Oils/Greases	O/G	

GROUT JOINT

The recommended grout joint:
1/8" RECT

MORE INFO:



Town & Country Surfaces
230 Fifth Avenue
Suite 1714
New York NY 10001

General Inquiries:
info@tncsurfaces.com
Phone: 212-679-0312

