




Ambit

C O L L E C T I O N




TOWN &
COUNTRY
SURFACES


GLOSSY FINISH



White GLOSSY
ADHOF



Ivory GLOSSY
ADHON




Grey GLOSSY
ADHOI



Aqua GLOSSY
ADHOM



Silver GLOSSY
ADHOP




Ebony GLOSSY
ADHOS

FIELD TILES
FLAT




831 3"x12"

TEXTURED




930 3"x12" Stripes




932 3"x12" Stripes 2 Lines

TRIMS
FINISHING EDGES




FE

512 FE 0.4"x12"



FE

519 FE 0.4"x12" Stripes




FE

520 FE 0.4"x12" Stripes 2 Lines




500 FE Corner

MATTE FINISH

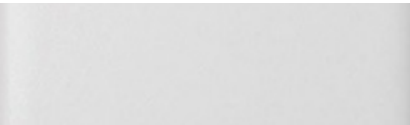

White MATTE
ADHOF




Ivory MATTE
ADHON




Grey MATTE
ADHOI



Aqua MATTE
ADHOM



Silver MATTE
ADHOP

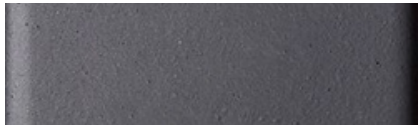


Ebony MATTE
ADHOS

FIELD TILES
FLAT




831M 3"x12"

TEXTURED




930M 3"x12" Stripes




932M 3"x12" Stripes 2 Lines

TRIMS
FINISHING EDGES




FE

512M FE 0.4"x12"



FE

519M FE 0.4"x12" Stripes



FE

520M FE 0.4"x12" Stripes 2 Lines



500M FE Corner

Silver GLOSSY ADHOP



Grey GLOSSY & MATTE ADHOI



Aqua GLOSSY ADHOM





TECHNICAL GUIDE



FIELD TILES		
SIZE	SIZE SPECIFICATIONS	THICKNESS*
FLAT TILE		
3"x12"	2.953"x11.811" (75mm x 300mm)	0.386" (9.8mm)
TEXTURED TILE		
3"x12" Stripes	2.953"x11.811" (75mm x	0.386" (9.8mm)
3"x12" Stripes 2	300mm) 2.953"x11.811"	0.386" (9.8mm)

(75mm x 300mm)

APPLICATIONS		
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL
Bathroom Walls	YES	YES
Shower Walls	YES	YES
Kitchen Walls	YES	YES
Countertops	YES	NO
Fireplace Surrounds	YES	YES
Outdoor Cooking / Bar Spaces (Non Freeze-Thaw Climates)	YES	YES
Pool Waterlines / Water Fountains	NO	NO
Floors	NO	NO


PERFORMANCE CHARACTERISTICS		
	TEST METHOD ASTM / ISO	RESULT
Water Absorption	C-373 / 10545-3	Pass
Breaking Strength	C-648 / 10545-4	Pass
Stain Resistance	C-1378 / 10545-14	Resistant
Chemical Resistance	C-650 / 10545-13	Resistant
Facial Dimensions	C-499 / 10545-2	Pass
Range of Thickness	C-499 / 10545-2	Pass
Warpage	C-485 / 10545-2	Pass

INSTALLATION	
GROUT JOINT RECOMMENDATION	SHADE VARIATION
1/8"	V1 - Uniform Appearance

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS	
Glaze	Solid with subtle movement
Surface Sheen	Glossy and Matte
Texture	Smooth

*Thickness is understood as the highest point of the tile.
Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

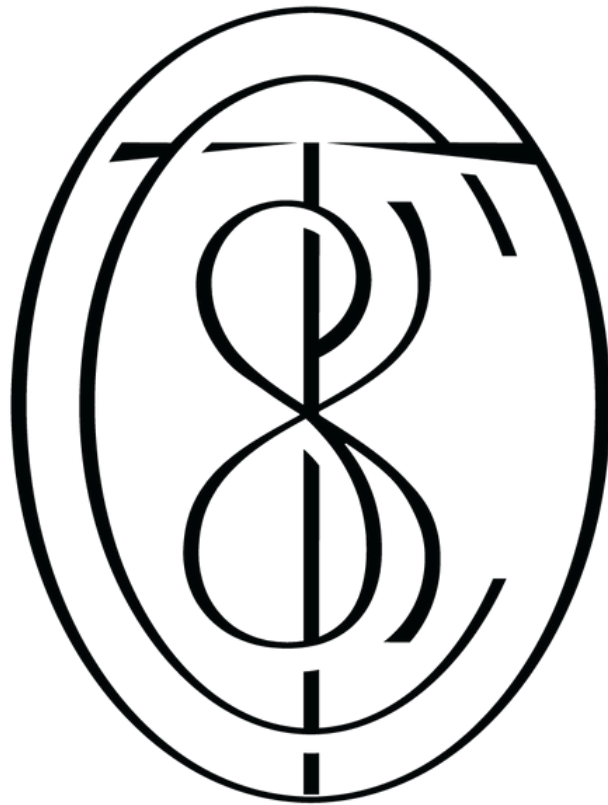

MORE INFO:



Town & Country Surfaces

230 Fifth Avenue

Suite 1714

New York NY 10001

General Inquiries:

info@tncsurfaces.com

Phone: 212-679-0312